



Thermal Grizzly Conductionaut High Performance Thermal Grease - 5g

\$39.95 As low as
\$35.95

Product Images



Short Description

Our Conductionaut liquid metal thermal compound is designed for applications that require very high efficiency. Conductionaut is recommended for experienced users who are looking for a top performance product with best heat dissipation where temperature ranges are above 8 °C.

Description

Our Conductionaut liquid metal thermal compound is designed for applications that require very high efficiency. Conductionaut is recommended for experienced users who are looking for a top performance product with best heat dissipation where temperature ranges are above 8 °C.


- Ultra high thermal conductivity
- Increased indium content
- Easy application with synthetic needle

For pricing on large quantity orders please email us at Sales@performance-pcs.com

Note: This Item can not be shipped using DHL

Features

| Application | Rating |
|---------------------------------|---------------|
| <i>Thermal Conductivity</i> | ***** |
| <i>Extreme-Overclocking</i> | * |
| <i>Overclocking</i> | ***** |
| <i>Water Cooling</i> | ***** |
| <i>Air Cooling</i> | ***** |
| <i>Silicone Sensitive Areas</i> | — |

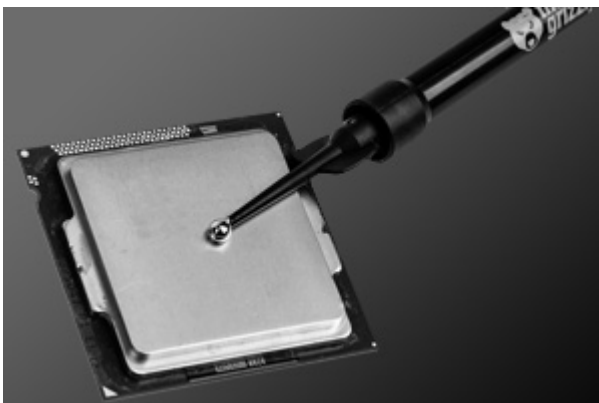

Thermal Grizzly Conductonaut is a liquid metal thermal compound based on a eutectic alloy. Our special mixture of metals like tin, gallium and indium, Conductonaut excels with a very high thermal conductivity and excellent long-term stability.

Specifications

| | |
|-----------------------------|-----------------|
| <i>Thermal Conductivity</i> | 73 W/mk |
| <i>Viscosity</i> | 0,0021 Pas |
| <i>Density</i> | 6,24g/cm3 |
| <i>Temperature</i> | 10 °C / +140 °C |
| <i>Content</i> | 5 g |

Note: Conductonaut thermal grease must not be used with aluminum heatsinks!

Additional Information

| | |
|----------------|-----------------|
| Brand | Thermal Grizzly |
| SKU | TG-C-005-R |
| Weight | 0.2500 |
| TIM Type | Paste |
| Vendor SKU/EAN | 0753677507463 |

