


Performance-PCs.com

1701 R. J. Conlan Blvd. NE, Unit #5 Palm Bay, FL 32905, USA

Toll Free: 888-381-8222








www.performance-pcs.com sales@performance-pcs.com

Thermaltake Riing Silent 12 Red CPU Cooler

\$39.99

Product Images

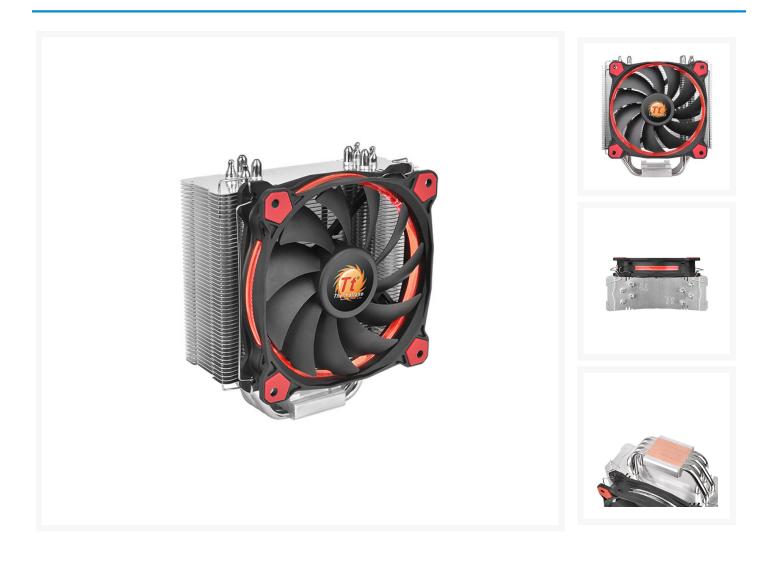



Short Description

The latest Riing Silent 12 CPU cooler is with PWM function, designed for use with high-end RAM and motherboards.

A 120mm fan fitted to enhance the airflow produces impressive cooling performance with an optimized 11 fan-blade design. Hydraulic bearings for silent operation guarantee ultra-low noise. The patented LED ring maintains color and brightness uniformity, and the lighting effect is visible from all sides and angles.

Description

The latest Riing Silent 12 CPU cooler is with PWM function, designed for use with high-end RAM and motherboards.

A 120mm fan fitted to enhance the airflow produces impressive cooling performance with an optimized 11 fan-blade design. Hydraulic bearings for silent operation guarantee ultra-low noise. The patented LED ring maintains color and brightness uniformity, and the lighting effect is visible from all sides and angles.

Features

Eleven Fan Blade Design

Eleven fan blades are engineered to create large volume of air passing through the heatsink at any angle and provide the best balance between silent and performance.

Riing Silent 12 is with PWM function which allows the motherboard to run the fan precisely at its necessary speed. This guarantees the required cooling and minimizes the noise level.

Wind Blocker Frame

To achieve maximum cooling performance in all applications, the wind blocker frame is designed to direct airflow towards the middle section of the blade, thereby creating a compression effect and blocking any air from escaping. This special design reduces the blade's noise and vibration, creating a perfect balance between power and sound.

Patented Riing LED The color and brightness uniformity of the patented LED ring is visible from all directions and adds style to the chassis.

Hydraulic Bearing Design

The hydraulic bearing self-lubricates with a high quality, friction-reducing substance that reduces operating noise and improves efficiency. The seal cap prevents leakage of the lubricant, and improves the lifespan of the unit.

Optimized Silent Operation

For acoustic test, Riing Silent 12 was tested in a semi-anechoic chamber which includes anti-vibration, sound-proof, and sound-absorbing effect.

With a LNC (Low-Noise Cable), Riing Silent 12 can reduce the noise level by 29% from 18.8 dBA to 13.4 dBA, and 50% of fan speed.

Thermal Image Demonstrates for Heat Distribution

Riing Silent 12 delivers outstanding cooling performance, keeping the temperature between 30°C and 32.5°C (ambient temperature is 20°C) @Intel® Core™ i7-4770K 3.8GHz at full load.

Superior Heat Dissipation

Optimized 0.4mm thickness aluminum fins with 2.2mm air gap, and 4 x Ø6mm solid copper heat-pipes are designed for rapid heat dissipation, allowing maximum heat conductivity. The tower's side flow design delivers the best cooling performance. In addition, the heat-pipes are in continuous direct contact with the CPU to ensure fast and efficient heat dissipation.

Anti-Vibration Mounting Systems with Non-Interference Cooling

Anti-vibration rubber pads strengthen stability during operation and provide hassle-free usage for 80% protection coverage, including all four corners. And Riing Silent 12 solves the co-existing problem of high performance RAM and CPU coolers, achieving the best RAM clearance.

Specifications

P/N	CL-P022-AL12RE-A
Compatibility	Intel LGA 2011-3/2011/1366/1156/1155/1151/1150/775 AMD FM2/FM1/AM3+/AM3/AM2+/AM2
Heatsink Material	Aluminum Fins Copper Heatpipes

Heatpipe	Ф6mm x 4 pcs	
Dimension	159 x 140 x 74 mm (H x W x L)	
Fan Dimension	120 x 120 x 25 mm(L xW x H)	
Fan quantity	1pcs	
Fan Speed	500~1400 RPM 300~700 RPM (with LNC)	
Rated Voltage	12V	
Start Voltage	9.0 V	
Rated Current	0.21 A	
Power Input	2.52 W	
Air Flow	53 CFM	
Air Pressure	1.23 mm-H2O	
Acoustical Noise	18 ±1 dBA 13 ±1 dBA (with LNC)	
Life time/Fan Life time	40,000 hours	
Pin Connector	4 pin PWM + LNC (Low-Noise Cable) 50% fan speed and 29% noise can be reduced	
Cooling Power	150 W	
Weight	825 g	

Additional Information

Brand	Thermaltake
SKU	CL-P022-AL12RE-A
Weight	2.1000
Color	Blue
Material	Copper/Aluminum
Fan Dimensions	120mm
Fan Connection	4-Pin PWM
Fan RPM	1400
Fan CFM	53
Vendor SKU/EAN	841163064122

