


Performance-PCs.com

1701 R. J. Conlan Blvd. NE, Unit #5 Palm Bay, FL 32905, USA

Toll Free: 888-381-8222






\$8.99



www.performance-pcs.com sales@performance-pcs.com

PrimoChill 7/16in. x 5/8in. FlexSX Series Compression Fitting - UV Red

Product Images

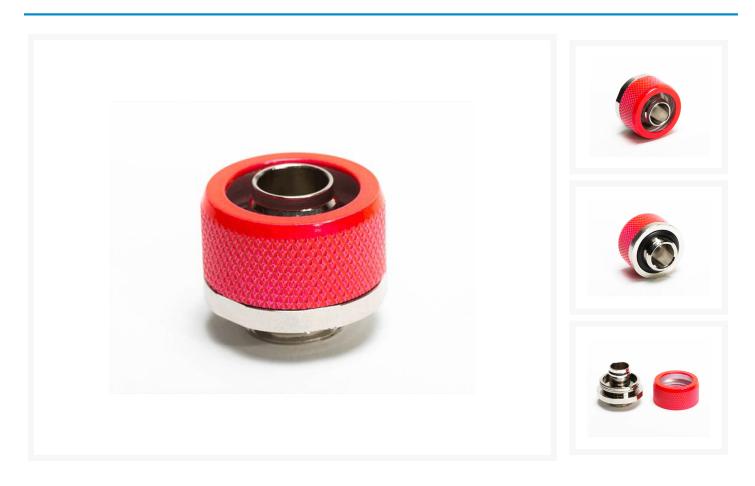

Short Description

PrimoChill has expanding the SpectraX color and texture line of parts with the FlexSX soft tubing compression fittings. Taking your system to the next level is an art form driven by color and textures. Now these amazing colors are available for enthusiasts that prefer flexible tubing.

Description

PrimoChill has expanding the SpectraX color and texture line of parts with the FlexSX soft tubing compression fittings. Taking your system to the next level is an art form driven by color and textures. Now these amazing colors are available for enthusiasts that prefer flexible tubing.

Like the RSX fitting line, PrimoChill continues to launch parts based on our signature principles. A fitting built for functionality complimented by its distinct aesthetics. Not all fittings are created equal and the FlexSX is another example of this.

Features

HANDCRAFTED ALUMINUM Compression caps created in a multiple step process that achieves corrosion resistance with an uncompromised finish.

COLOR CORRECTNESS SpectraX powder coated caps for unprecedented color correctness and long term consistency

CONTINUED INNOVATION A continuous industry leader in style and function within the water cooling community.

SIMPLIFIED USAGE Quick and simple installation with minimization of leakage or cross threading..

Specifications

Specifications:

- Industry Standard G 1/4 threads
- Nickel Plated Brass base
- Diamond Knurl Cap
- Available in 21 different colors

Compatibility:

These fittings are designed to work with the tubing below.

• 7/16 in. ID x 5/8 in. OD Flexible tubing

Included Parts:

• 1x FlexSX Fitting w/ O-ring

Installation:

- No installation tool required. Finger tighten only.
- FSX caps are coated with a durable powder coat but we still recommend handling with care so you can

enjoy the finish for years to come.

Warnings:Although aluminum is used for the outside compression ring, no aluminum comes in direct contact with the fluid so mix metal corrosion is not an issue. PrimoChill is not responsible for any hardware damage. Use at your own risk.

Additional Information

Brand	Primochill
SKU	F-FSX758-UR
Weight	0.1000
Special Order	No
Fitting Type	Compression
Fitting Size	7/16" x 5/8"
Fitting Angle	Straight
Fitting Finish	Red

