

Performance-PCs.com

1701 R. J. Conlan Blvd. NE, Unit #5 Palm Bay, FL 32905, USA

Toll Free: 888-381-8222

www.performance-pcs.com sales@performance-pcs.com




Follow Us Twitter







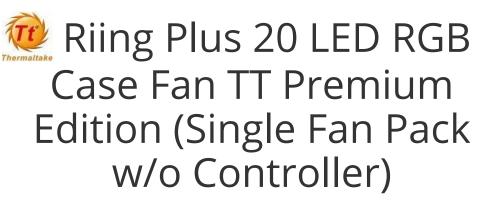

\$44.99

Product Images







Short Description

Specially made for those seeking a 200mm PWM fan with superior airflow, silent operation and customizable RGB lighting, Thermaltake Riing Plus 20 RGB features compression blades, hydraulic bearing, and a patented 16.8 million colors LED ring with 12 addressable LEDs sets (24 addressable LEDs). Supporting Thermaltake's patented TT RGB PLUS Software and AI interactive voice control, the Riing Plus 20 RGB lights up your system without sacrificing performance!

Description

Specially made for those seeking a 200mm PWM fan with superior airflow, silent operation and customizable RGB lighting, Thermaltake Riing Plus 20 RGB features compression blades, hydraulic bearing, and a patented 16.8 million colors LED ring with 12 addressable LEDs sets (24 addressable LEDs). Supporting Thermaltake's patented TT RGB PLUS Software and AI interactive voice control, the Riing Plus 20 RGB lights up your system without sacrificing performance!

- *Riing Plus digital controller is not included.
- *Only compatible with Riing Plus digital lighting controller.

Features

TT RGB PLUS

TT RGB PLUS Ecosystem is the intelligent lighting system for PCs that combines the most advanced addressable LED lighting with Thermaltake's patented TT RGB PLUS Software. TT RGB PLUS ecosystem provides nearly unlimited possibilities for playing with colors, synchronizing lights to games, music, CPU temperatures or other TT RGB PLUS products, including case fans, CPU/VGA waterblocks, AIO CPU coolers,

PSUs, LED strips and peripherals. The patented software allows users to change the light modes, colors, speeds, brightness, fan speeds, and even supports Al voice control in iOS and Android devices.

Patented TT RGB PLUS Software & App

Monitor the fan performance, adjust the fan speeds, and customize the lighting effects for Thermaltake RGB PLUS series products with the patented TT RGB PLUS Software and an exclusively designed mobile app. Choose a function from below and scroll down to read the details.

SyncALL, Say "Hello TT" Thermaltake Al Voice Control

Talking to TT RGB PLUS App is an easier, faster way to set lights for your systems. You can ask it to turn the lights on or off, switch lights modes, dim the lights, change light colors, or adjust lights speeds or fan speeds. Choose a video from below to see how it works.

Fan Speeds

Simply drag the slider bar to adjust your fan speed RPM on a dedicated control panel. The software is also included a number of preset fan modes that allow you to set the fans to 'Silent Mode' where the RPM performs between a 500 – 640 RPM range, or 'Performance Mode' which operates and dynamically adjusts all the way up to 1000 RPM. Besides running at the optimal RPM range, you can customize the speed by disabling PWM.

Patented LED Design

Featuring 12 addressable LEDs sets (2 single LEDs per set), great light coverage, and uniform color and brightness, the built-in LED ring can paint your build with 16.8 million colors.

11 Fan Blade Design

200mm fan with unique 11 blades design is engineered to generate higher airflow without compromising on ultra-silent operation.

Hydraulic Bearing with Low-Noise Design

The hydraulic bearing self-lubricates with a high-quality, friction-reducing substance, which lowers operation noise while improving thermal efficiency. The seal cap prevents lubricant leakage and extends the lifespan of the unit.

Anti-Vibration Mounting System

In-mold injection anti-vibration rubber pads provide a hassle-free usage with 80% protection coverage for all corners.

Specifications

P/N	CL-F070-PL20SW-A (Fan x1)
Fan Dimension	200 x 200 x 30 mm
Interface	USB 2.0 connectors (9 Pin)
System compatibility	Windows 7 / 8 / 8.1 / 10
Fan Started Voltage	9.0 V
Fan Rated Voltage	12 V & 5V
Rated Current	Fan 0.28 A (one fan)
Power Input	12V - 3.36 W . 5V - 4.25 W (Fan*1)
Fan Speed	500 ~ 1000 R.P.M
Max. Air Pressure	1.68 mm-H2O
Max. Air Flow	117.96 CFM
Noise	29.2 dB-A
Bearing Type	Hydraulic Bearing
Life Expectation	40,000 hrs,25℃
Weight	343 g

^{*} Specifications are subject to change without notice.

* The product picture(s) is only for your reference, it may differ from the actual product.

Additional Information

Brand	Thermaltake
SKU	CL-F070-PL20SW-A
Weight	1.2000
Color	Black
Fan Dimensions	200mm
Fan Width	30mm
Fan Voltage	12 VDC
Fan RPM	1000
Fan CFM	118
Fan Noise (dB)	29
LED Color	RGB
Vendor SKU/EAN	841163001981



5 4/20/24