


Performance-PCs.com

1701 R. J. Conlan Blvd. NE, Unit #5 Palm Bay, FL 32905, USA

Toll Free: 888-381-8222








www.performance-pcs.com sales@performance-pcs.com

PrimoFlex Advanced LRT Tubing - 3/8in. ID X 5/8in. OD - Pearl UV Orange

\$2.50

Product Images

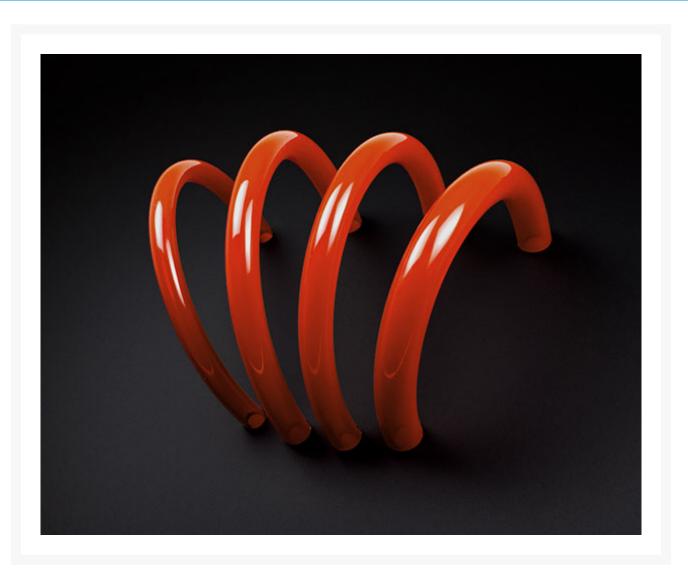

PrimoFlex[™] ADVANCED LRT[™] Tubing has been designed, formulated and manufactured for today's evolving standards in the PC water cooling industry. Advanced LRT[™] has been carefully formulated to enable it to perform in a wider range of closed loop cooling systems, making it the most compatible water cooling tubing ever created.

Description

PrimoFlex[™] ADVANCED LRT[™] Tubing has been designed, formulated and manufactured for today's evolving standards in the PC water cooling industry. Advanced LRT[™] has been carefully formulated to enable it to perform in a wider range of closed loop cooling systems, making it the most compatible water cooling tubing ever created.

Low Radius Technology

PrimoChill's proprietary blend of extremely low durometer PVC and a more rigid polymer resin gives PrimoFlex[™] Advanced LRT[™] its unbeatable bend ratio and durability. Even under exacting laboratory set-ups with abrupt small radius bends and multiple direction changes, Advanced LRT[™] tubing resists twisting and collapse allowing for tighter bends without the kinking that can cause cooling failures or a reduction in system performance (A common problem when using other lesser brands).

Clarity in Sight and Mind

Smooth inner walls improve closed loop sanitation. Advanced LRT[™] smooth surface inhibits particulate gathering or entrapment onto the tubing wall, thus reducing the potential of bacterial growth and contamination. With its new "resistant" inner walls, Advanced LRT[™] will keep your system looking and feeling as clean as the day it was installed. The new technology used in PrimoFlex[™] ADVANCED LRT[™] has removed the need for the antimicrobial formerly impregnated in the Pro LRT tubing. The results are a noticeable improvement of clarity over PRO LRT[™].

Features

- Trusted/Experienced Brand (PrimoFlex LRT)
- "Glass-like" transparency (Clear LRT)
- Superior UV Transmission
- Logo Free (no print on tube)
- Inner Wall resilience
- Environmentally responsible, safe and non toxic product

Specifications

- DEHP Free
- Phthalate Free
- California' s Prop 65 compliant
- FDA Approved ingredients
- ROHS Compliant PVC

Warning:

- Please be sure this tubing is appropriate for your application, once the tubing is cut we do not accept returns on this product! PRICE IS PER ONE FOOT.
- With the use of different components, materials, fluids, and flow rates, results may vary with the appearance of your tubing. Although Advanced LRT^{IM} is designed to work with a large variety of cooling components the use of alcohols, Ethylene Glycol and as well as any other harmful chemicals is strictly prohibited and will void your warranty. Tubing will stain if "dyed" coolants are used. PrimoChill is not responsible for any damage caused by or when using this product. Please use at your own risk.

Additional Information

Brand	Primochill
SKU	PFLEXA-58-PUO-D
Weight	0.2000
Color	UV Orange
Tube Type	PVC
Tube Size	3/8" x 5/8" (10mm x 16mm)
Material	PVC
Delivery	Bulk

