

Performance-PCs.com

1701 R. J. Conlan Blvd. NE, Unit #5 Palm Bay, FL 32905, USA

Toll Free: 888-381-8222

www.performance-pcs.com sales@performance-pcs.com



Follow Us Twitter









EK-Torque STC-10/13 -Nickel (3829)


\$6.49

Product Images







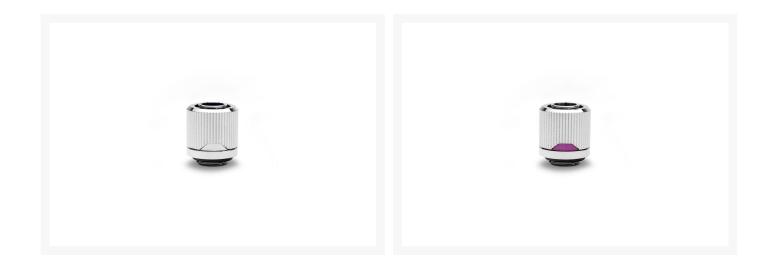

Short Description

EK-Torque STC 10/13 fittings are EK's new minimalistic 10/13mm (ID/OD) soft-tube compression fittings designed for use with various flexible soft tubing types such as PVC, EPDM, Norprene, silicone or any other type of compatible flexible tube. With a non-intrusive, yet striking look, and with NO added branding at all. They can be complemented by interchangeable aesthetic color rings, and are an ideal choice for anyone and a perfect match with EK-Quantum series products.

Description

EK-Torque STC 10/13 fittings are EK's new minimalistic 10/13mm (ID/OD) soft-tube compression fittings designed for use with various flexible soft tubing types such as PVC, EPDM, Norprene, silicone or any other type of compatible flexible tube. With a non-intrusive, yet striking look, and with NO added branding at all. They can be complemented by interchangeable aesthetic color rings, and are an ideal choice for anyone and a perfect match with EK-Quantum series products.

The locking ring prevents solid tube to be pulled out of the fitting by compressing the rubber gasket underneath the ring. The grooves on the outside allow for easier hand tightening. The compression ring has cutouts in EK Quantum signature shape allowing for the colored aesthetic ring to be shown. The colored rings are available in many colors and are screwed onto the fitting before the compression locking ring. The aesthetic rings are sold separately.

The fitting barb and the compression rings are covered with a unique, high-quality nickel finish. Both are made of CNC machined brass and the seal is made quality rubber O-rings.

The base fitting surface is smooth and has no adequate gripping surface, but the inside of the barb is socketed with a 9mm hex Allen key pattern. It's highly recommended to use an Allen Key 9mm (purchased separately) to prevent skin damage to the fingertips while installing the fitting. Please, be advised not to use excessive force when attaching fitting barbs using Allen Key 9mm in order to prevent damage to other liquid cooling products!

These fittings are guaranteed to be compatible with all other EK Water Blocks liquid cooling products.

Specifications

Technical data:

- Finish: Nickel

- Thread: G1/4" BSPP; 4.5mm male thread length

Supported tube: 10/13mm (ID/OD)The outer diameter of a fitting: 20mm

- Installed height: 19mm

- Compatible soft tubing: PVC, EPDM, Norprene, silicone

Made in Europe - Slovenia!

PLEASE NOTE:

- Do not use excessive force when attaching fitting barbs using Allen Key 9mm in order to prevent damage!
- This product should NOT be installed with any aluminum Fluid Gaming parts!
- The aesthetic rings are sold separately.

Additional Info

|--|

Additional Information

Brand	EK Waterblocks
SKU	EK-TORQUE-STC-1013-NK
Weight	0.1500
Special Order	No
Fitting Type	Compression
Fitting Size	10/13mm
Fitting Angle	Straight
Vendor SKU/EAN	3831109813829

4/24/24

