

Performance-PCs.com

1701 R. J. Conlan Blvd. NE, Unit #5 Palm Bay, FL 32905, USA

Toll Free: 888-381-8222

www.performance-pcs.com sales@performance-pcs.com




Follow Us Twitter







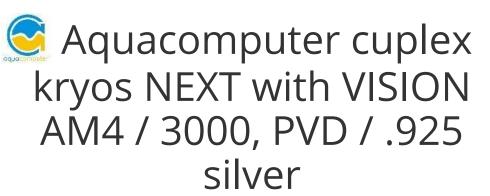

\$262.50

Product Images





Short Description

The cuplex kryos NEXT represents a new milestone in the development of CPU water coolers. Every detail has been analyzed, optimized and tested in order to achieve perfection in the areas of cooling performance, assembly and range of functions. The result is not just a CPU cooler that sets new standards in cooling performance - an entire model family covers a spectrum of color and equipment variants.

Description

The cuplex kryos NEXT represents a new milestone in the development of CPU water coolers. Every detail has been analyzed, optimized and tested in order to achieve perfection in the areas of cooling performance, assembly and range of functions. The result is not just a CPU cooler that sets new standards in cooling performance - an entire model family covers a spectrum of color and equipment variants. A unique feature of CPU water coolers in the VARIO models is a base plate that can be deformed during operation - never before has a CPU cooler been able to be set for optimum fit to the CPU during operation. The models with the VISION module are equipped with powerful electronics: a high-resolution OLED display, integrated water temperature measurement and USB interface are just three examples of the range of functions.

Features

Radiator floor with micro structure

The cooler base of the cuplex kryos NEXT is equipped with an extremely fine microstructure, the structure width is less than 200 μ m. The coolant flows through a flat nozzle integrated in the cooler housing into the center of the microstructure and is discharged from there in two directions. The cooler base is made of copper, nickel-plated copper or .925 sterling silver, depending on the cooler variant.

Bracket system

The cuplex kryos NEXT mounting system consists of solid stainless steel sheets 2.5 mm thick, into which nickel-plated spring cups are pressed. Knurled screws and springs attach the cooler to the mainboard; when assembled, the holding system looks very tidy due to the spring cups and the low height. All bracket variants have a defined stop for optimal contact pressure and force distribution. The knurled screws can be assembled by hand, in addition, a hexagon socket drive allows easy assembly.

The cooler variants for socket 115x or AM3 are equipped with a backplate with a silicone cover, which additionally stabilizes the mainboard. With socket 2011 or AM4, a backplate is already part of the mainboard processor socket, an additional backplate is not required here.

When using the AM4 / 3000 bracket variant, the heat sink is not positioned centrally on the CPU, but is slightly offset off-center in accordance with the modified internal structure of the Ryzen 3000 CPU series for optimal heat dissipation.

Every cuplex kryos NEXT comes with excellent heat-conducting paste for optimal performance. It is 0.5 grams of Thermal Grizzly Kryonaut, packaged in a syringe for easy use. A plastic spatula for application is also included. The paste has a high thermal conductivity and, thanks to its low viscosity, is distributed very well between the CPU and the water cooler during assembly. The quantity supplied is sufficient for approx. Five assemblies of the cooler.

VISION: Integrated electronics

The VISION versions of the cuplex kryos NEXT are equipped with a microprocessor control and OLED graphic display. The main features include:

- Water temperature measurement integrated in the cooler
- Connection possibility for a flow sensor or alternatively alarm output
- USB interface to the PC
- aquabus interface for data exchange with an aquaero 5 or 6
- Configurable display pages in the display
- Display of various hardware data on the display using aquasuite software, e.g. B. Current processor load An RGB LED for lighting is also integrated in the acrylic versions of the cuplex kryos NEXT with VISION, which

can be controlled depending on the temperature or via USB.

Due to the limited space, a maximum of two connection cables can be routed into the cooler, possible combinations are therefore:

- USB and aquabus
- USB and flow measurement or alarm output
- aquabus and flow measurement or alarm output

Specifications

Material combination

PVD / .925 silver: brass body PVD coated, radiator bottom 925/000 sterling silver

Technical specifications

Dimensions:

Socket AM4: 111 x 75 x 22 mm (screws not included)

Connection thread: G1 / 4

Distance connecting thread: 24 mm

scope of delivery

- Assembled cooler
- mounting kit (screws, springs, etc.)
- Thermal Grizzly Kryonaut thermal paste, approx. 0.5 gram in syringe
- plastic spatula
- Assembly Instructions

Additional Information

Brand	Aquacomputer
SKU	AQ-21778
Weight	1.5000
Color	Gray
CPU Series	AM4/3000
Block CPU Type	AMD
Block Style	PVD/Silver- Silver
Vendor SKU/EAN	4260473312901

