



# Lian Li UNI FAN SL120

## Quick-connect, Interlocking

## Tracts Fluid Dynamic

## Bearing 120mm aRGB Case

## Fan - White

Special Price


**\$24.99** was  
**\$29.99**

### Product Images



Examples of Uni-Fan SL120 Multiple Fan Interlocking



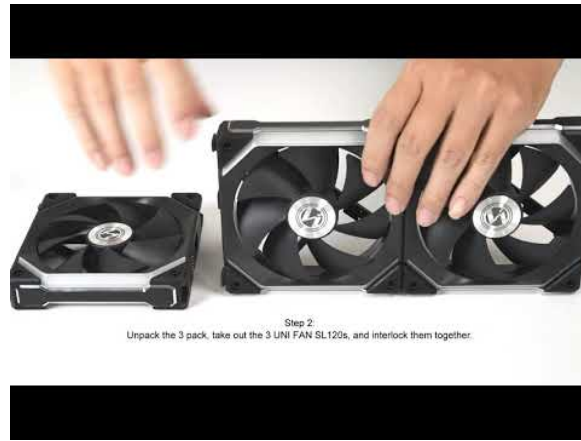

## Short Description

---

Lian Li has launched the UNI FAN SL120 combining style, performance, and creativity, the white and the black UNI FAN SL120. These are fans that feature a unique, modular interlocking system, which allows users to couple up to 16 fans together (under one controller) with a few simple actions. A special cable module with pin-to-pin contact points also means less wiring to worry about. Oh, and it can even sync up to 32 LEDs per fan for RGB goodness.

## Description

---

Lian Li has launched the UNI FAN SL120 combining style, performance, and creativity, the white and the black UNI FAN SL120. These are fans that feature a unique, modular interlocking system, which allows users to couple up to 16 fans together (under one controller) with a few simple actions. A special cable module with pin-to-pin contact points also means less wiring to worry about. Oh, and it can even sync up to 32 LEDs per fan for RGB goodness.

LIAN LI Industrial Co. Ltd., a leading manufacturer of aluminum chassis and PC accessories, announces the UNI FAN SL120, an innovative approach to reducing cables by interlocking and daisy-chaining the fans. Designed as 120mm high static pressure PWM fans with addressable RGB LEDs, the UNI FAN SL120 has a newly patented quick-connect daisy-chaining style system that simplifies cable management and mounting efforts. With up to 16 fans (4 sets of 4) under one fan controller, users can easily create an adapted profile to match their fan speed and synchronized lighting effect needs via the highly intuitive L-Connect software. Available in black or white, the UNI FAN SL120 offers a new premium look with lighting effects that do not compromise on performance.



## L-Connect

Focused on giving users more control over fan functionality, the clean and intuitive interface of the L-Connect software provides instant speed and RGB light management for individual fans or simultaneous control over all 4 clusters of fans. With 5 fan speed profiles, 14 lighting effects, and control over each effect's color, brightness, direction, and speed, L-Connect allows full customization of the look and feel of the system.

Alternatively, users can choose to sync with the motherboard software via the simple toggle of a switch.

## Interconnect to Simplify

Say goodbye to cable clutter and time wasted tightening screws with the new interlocking mechanism of the UNI FAN SL120. Designed to slide and lock, the interlocking mechanism and quick-connect PINs ensure that structural rigidity and power is sustained along the cluster of fans. With its modular approach, power to the fan blades and LEDs is provided by an easy sliding connector, meaning only two cables are necessary to power up to 4 fans. Connected to a hub that can host up to 4 clusters, this means up to 16 fans require only 8 cables, compared to 32 with traditional fans, making cable management a breeze. And since the cluster acts as one, the sturdiness means fewer screws are required to mount the fans securely to the system, saving precious time and avoiding awkward screwing positions during the installation process.

## Made to Last and Made with Style

Each PWM high static pressure UNI FAN SL120 offers great performance with speeds ranging between 800 to 1900 rpm at low noise levels thanks to the fluid dynamic bearing technology which provides a thin layer of fluid to support the load of the fan blades. In addition, each fan features a magnet centered at the back to reduce vibrations and noise while in operation. While providing sufficient airflow, the 32 addressable LEDs in each fan provide a smooth customizable lighting effect that shines through the diffuser on each side of the fan, bringing a unique style to PC builds.

\*\* It must be noted that the controller included in the pack of 3 is required to operate the UNI FAN SL120.

## Features

---

AVAILABLE IN TWO COLORS



BLACK WHITE

#### UNPRECEDENTED MODULARITY



- 16GB or 32GB capacity
- 1.35V DDR5-6000 or 6400
- 16GB or 32GB capacity



#### DESIGNATED CABLE MODULES FOR UNI FAN SL120

Each Corsair Vengeance cable module is designed with a unique 16-pin connector to ensure power and signal. And cable modules are designed to be 100% compatible with the Corsair Vengeance cable module for the SL120.



Each Corsair Vengeance cable module is designed with a unique 16-pin connector to ensure power and signal. And cable modules are designed to be 100% compatible with the Corsair Vengeance cable module for the SL120.

#### SOPHISTICATED RGB LIGHTING

The SL120 features 168 LEDs, providing a vibrant 16.8 million color RGB lighting effect.



#### VIBRANT RGB LIGHTING VISIBLE FROM ALL ANGLES

The SL120 is made with a clear, transparent fan frame, allowing the RGB lighting to be visible from all angles.



#### L-CONNECT SOFTWARE FOR A MORE INTUITIVE FAN CONTROL

With the range of controls, changing control between individual fans and the L-Connect software.

Download L-Connect

The L-Connect software is designed to be used with the SL120 fan, allowing you to control the fan speed and the RGB lighting.




#### MORE DURABLE, EXTREMELY SILENT

A standard 12V fan is known to be noisy.



SL120


#### PREMIUM LOOK, EXQUISITE DETAILING




#### A DESIGNATED UNI FAN CONTROLLER TO EASILY MANAGE 16 FANS IN ONE GO



The SL120 is designed to be used with the Corsair SL120 fan, allowing you to control the fan speed and the RGB lighting.



The SL120 is designed to be used with the Corsair SL120 fan, allowing you to control the fan speed and the RGB lighting.



The SL120 is designed to be used with the Corsair SL120 fan, allowing you to control the fan speed and the RGB lighting.

# Specifications

---

Model	UNI FAN SL120
Fan Dimension	122.8 X 122.4 X 25 ( mm )
Rated Voltage	DC 12V(FAN) & 5V(LED)
Fan Speed	800~1900RPM
Max. Air Pressure	2.54mmH2O
Max. Air Flow	58.54CFM
Acoustical Noise (Min-Max.)	17dB ~ 31dB
Locked Current	>= 0.5mA
Bearing Type	Fluid Dynamic Bearing(FDB)
Operation Voltage	DC 12V & 5V
Start-up Voltage	DC 6.0V
Input Current	0.18A(FAN) / 0.6A (LED)
Input Power	3.5Watt

## Additional Information

Brand	Lian-Li
SKU	UF-SL120-1W-D
Weight	1.0000
Color	White
Fan Dimensions	120mm
Fan Width	27mm
Fan Connection	4-Pin PWM
Fan Voltage	12 VDC
Fan RPM	1900
Fan CFM	58
Fan Noise (dB)	31
LED Color	RGB
Special Price	\$24.99

