



# Lian Li UNI FAN SL120

## Quick-connect, Interlocking Tracts Fluid Dynamic Bearing 120mm aRGB Case Fan - White


Special Price  
**\$24.99** was  
~~\$29.99~~

### Product Images



Examples of Uni-Fan SL120 Multiple Fan Interlocking



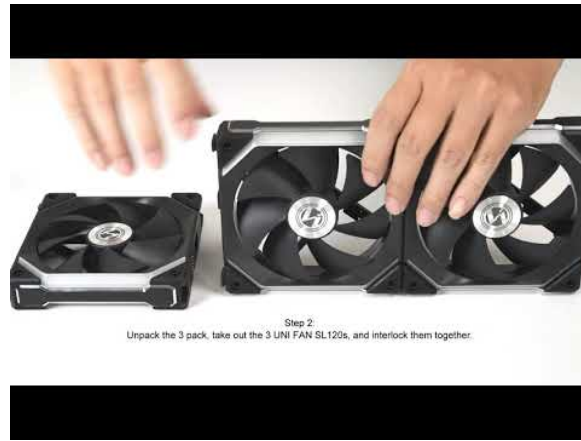

## Short Description

---

Lian Li has launched the UNI FAN SL120 combining style, performance, and creativity, the white and the black UNI FAN SL120. These are fans that feature a unique, modular interlocking system, which allows users to couple up to 16 fans together (under one controller) with a few simple actions. A special cable module with pin-to-pin contact points also means less wiring to worry about. Oh, and it can even sync up to 32 LEDs per fan for RGB goodness.

## Description

---

Lian Li has launched the UNI FAN SL120 combining style, performance, and creativity, the white and the black UNI FAN SL120. These are fans that feature a unique, modular interlocking system, which allows users to couple up to 16 fans together (under one controller) with a few simple actions. A special cable module with pin-to-pin contact points also means less wiring to worry about. Oh, and it can even sync up to 32 LEDs per fan for RGB goodness.

LIAN LI Industrial Co. Ltd., a leading manufacturer of aluminum chassis and PC accessories, announces the UNI FAN SL120, an innovative approach to reducing cables by interlocking and daisy-chaining the fans. Designed as 120mm high static pressure PWM fans with addressable RGB LEDs, the UNI FAN SL120 has a newly patented quick-connect daisy-chaining style system that simplifies cable management and mounting efforts. With up to 16 fans (4 sets of 4) under one fan controller, users can easily create an adapted profile to match their fan speed and synchronized lighting effect needs via the highly intuitive L-Connect software. Available in black or white, the UNI FAN SL120 offers a new premium look with lighting effects that do not compromise on performance.



## L-Connect

Focused on giving users more control over fan functionality, the clean and intuitive interface of the L-Connect software provides instant speed and RGB light management for individual fans or simultaneous control over all 4 clusters of fans. With 5 fan speed profiles, 14 lighting effects, and control over each effect's color, brightness, direction, and speed, L-Connect allows full customization of the look and feel of the system. Alternatively, users can choose to sync with the motherboard software via the simple toggle of a switch.

## Interconnect to Simplify

Say goodbye to cable clutter and time wasted tightening screws with the new interlocking mechanism of the UNI FAN SL120. Designed to slide and lock, the interlocking mechanism and quick-connect PINs ensure that structural rigidity and power is sustained along the cluster of fans. With its modular approach, power to the fan blades and LEDs is provided by an easy sliding connector, meaning only two cables are necessary to power up to 4 fans. Connected to a hub that can host up to 4 clusters, this means up to 16 fans require only 8 cables, compared to 32 with traditional fans, making cable management a breeze. And since the cluster acts as one, the sturdiness means fewer screws are required to mount the fans securely to the system, saving precious time and avoiding awkward screwing positions during the installation process.

## Made to Last and Made with Style

Each PWM high static pressure UNI FAN SL120 offers great performance with speeds ranging between 800 to 1900 rpm at low noise levels thanks to the fluid dynamic bearing technology which provides a thin layer of fluid to support the load of the fan blades. In addition, each fan features a magnet centered at the back to reduce vibrations and noise while in operation. While providing sufficient airflow, the 32 addressable LEDs in each fan provide a smooth customizable lighting effect that shines through the diffuser on each side of the fan, bringing a unique style to PC builds.

\*\* It must be noted that the controller included in the pack of 3 is required to operate the UNI FAN SL120.

## Features

---

AVAILABLE IN TWO COLORS



BLACK WHITE

UNPRECEDENTED MODULARITY



- 400mm mounting brackets
- 100mm cable length for easy management and signal
- 100mm cable for mounting holes



DESIGNATED CABLE MODULES FOR FAN SLI 120

SLI 120 fans feature a cable module with an integrated connector and a 4-pin power and signal cable. The cable module is designed to be easily inserted into the fan's cable connector.



SLI 120 fans feature a cable module with an integrated connector and a 4-pin power and signal cable. The cable module is designed to be easily inserted into the fan's cable connector.

SOPHISTICATED RGB LIGHTING

The SLI 120 features RGB lighting that is visible from all angles. The lighting is controlled by the L-CONNECT software.




VIBRANT RGB LIGHTING VISIBLE FROM ALL ANGLES

The SLI 120 features RGB lighting that is visible from all angles. The lighting is controlled by the L-CONNECT software.



L-CONNECT SOFTWARE FOR A MORE INTUITIVE FAN CONTROL

Put the edge of a screwdriver into the fan's control hole and connect it to the L-CONNECT software.




MORE DURABLE, EXTREMELY SILENT

An upgrade in fan blades for 10% higher efficiency.




SLI 120

PREMIUM LOOK, EXQUISITE DETAILING



A DESIGNATED FAN CONTROLLER TO EASILY MANAGE 16 FANS IN ONE GO



For more information, please visit our website at [www.asus.com](http://www.asus.com).

## Specifications

---

<b>Model</b>	UNI FAN SL120
<b>Fan Dimension</b>	122.8 X 122.4 X 25 ( mm )
<b>Rated Voltage</b>	DC 12V(FAN) & 5V(LED)
<b>Fan Speed</b>	800~1900RPM
<b>Max. Air Pressure</b>	2.54mmH2O
<b>Max. Air Flow</b>	58.54CFM
<b>Acoustical Noise (Min-Max.)</b>	17dB ~ 31dB
<b>Locked Current</b>	>= 0.5mA
<b>Bearing Type</b>	Fluid Dynamic Bearing(FDB)
<b>Operation Voltage</b>	DC 12V & 5V
<b>Start-up Voltage</b>	DC 6.0V
<b>Input Current</b>	0.18A(FAN) / 0.6A (LED)
<b>Input Power</b>	3.5Watt

## Additional Information

---

Brand	Lian-Li
SKU	UF-SL120-1W-D
Weight	1.0000
Color	White
Fan Dimensions	120mm
Fan Width	27mm
Fan Connection	4-Pin PWM
Fan Voltage	12 VDC
Fan RPM	1900
Fan CFM	58
Fan Noise (dB)	31
LED Color	RGB
Special Price	\$24.99

