




# Lian Li UNI FAN AL Series 120mm fans - 3-Pack - Black

\$89.99

## Product Images





## Description

---

**LNFAN AL120**  
120mm ARGB Fan

Available in two colors

**THE NEXT EVOLUTION**

AVAILABLE IN TWO COLORS

**MODULARITY FAN**

120mm ARGB Fan

**BETTER PERFORMANCE**

Designed by LNFAN AL120 ARGB Fan, it is a high-quality fan with a 120mm diameter, 25mm thickness, and 1200 RPM. It is a high-quality fan with a 120mm diameter, 25mm thickness, and 1200 RPM.



**ENDLESS LIGHTING EFFECT COMBINATIONS**

The ARGB LEDs are installed in the front, back, and side of the fan, providing a wide range of lighting effects.

Users can adjust the lighting effects through the software, providing a wide range of lighting effects.



Select 1 Set for fan mode and color for lighting system, including fan mode and color.



**Define 2. Define the connecting lighting mode**

RAINBOW	COLOR CYCLE	TRANSIC	RGB
RAINBOW CYCLE	RAINBOW	RAINBOW	RAINBOW
RAINBOW CYCLE	RAINBOW CYCLE	RAINBOW CYCLE	RAINBOW CYCLE



**STATIC COLOR**

**L-CONNECT 2 SOFTWARE TO CONTROL ALSO**

Multiple control options for the lighting effects of the ARGB fan, including L-CONNECT 2 software.

**ADJUST THE SPEED OF EACH FAN GROUP**

Multiple control options for the lighting effects of the ARGB fan, including L-CONNECT 2 software.

**SET PERSONALIZED LED MODE AND COLOR**

Designed by LNFAN AL120 ARGB Fan, it is a high-quality fan with a 120mm diameter, 25mm thickness, and 1200 RPM. It is a high-quality fan with a 120mm diameter, 25mm thickness, and 1200 RPM.

**CONTROL UP TO 16 FANS IN ONE GO**

The software can control up to 16 fans in one go, providing a wide range of lighting effects.

ARGB Cable  
USB Cable  
PWM Cable

Fan Group ARGB Signal  
Fan Group PWM Signal

**MANAGE UP TO 64 FANS**

L-CONNECT 2 can manage up to 64 fans in one go, providing a wide range of lighting effects.

**DAZZLING AT ALL ANGLES**

## Features

---

- Simple assembly with interlocking and daisy chain functionality
- Only two cables required for a cluster of fans
- Aesthetic look with aluminum medallion and LEDs on both sides
- Customized LEDs on fan blades and the inner edge of the fan frame
- Multiple lighting effects/fan speed control via L-connect software
- Improved static pressure and airflow while remaining silent

## Specifications

---

AVAILABLE IN TWO KINDS OF PACKAGING


3 Pack

Single Pack



NOTE

To fully control up to 16 UNI FAN (4 fans each cluster) in one go either through the built-in L-Connect2 software or the motherboard software, users must use the designated UNI FAN controller included in the AL120 3 pack. Please note that the single pack version does not contain this controller and thus we recommend users to purchase at least one AL120 3 pack for their build.

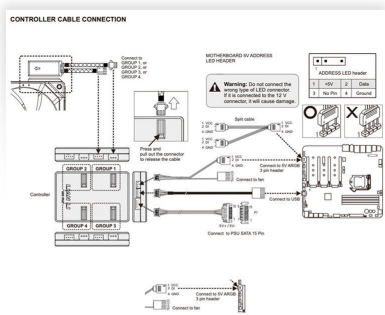

NOTE


\*"UNI HUB" requires the PWM signal while performing PWM mode on L-Connect2. Please enter your MB BIOS and check the fan header is at PWM mode. DC mode or any other mode will not be detected by the UNI HUB.

\*\*Update your MB BIOS system if necessary.


Please note that below radiators are known not compatible with UNI FAN.

- 1. ARCTIC Liquid Freezer II Series
- 2. COOLAR-ICUE WHITE RGB PRO XT Liquid CPU Cooler
- 3. CORSAIR Hydro Series™ HT10i GT 280mm Extreme Performance Liquid CPU Cooler

Please check the rules to see if UNI FAN can be assembled on a specific radiator.

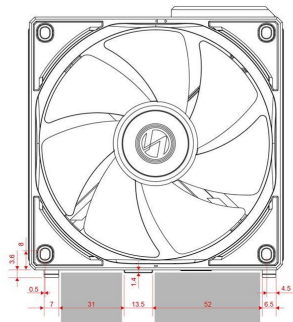

Rule 1. The tubes of the radiator must avoid the tenon of the UNI FAN and be at the safe area, which is in grey at above picture.

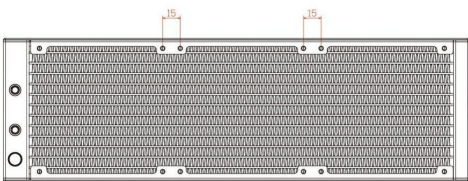

Rule 2. The screw holes between the two fans must be 15mm width on the radiator for either 120mm or 140mm UNI FAN.

SPECIFICATIONS

PRODUCT NAME	UNI FAN AL120			
MODEL	AL120-3B	AL120-1B	AL120-3W	AL120-1W
COLOR	Black		White	
NUMBER OF FANS	3	1	3	1
CONTROLLER	Yes	No	Yes	No
MATERIAL	PBT/PC/Aluminum			
FAN DIMENSION	120 X 120 X 25mm			
RATED VOLTAGE	DC 12V (FAN) & 5V (LED)			
FAN SPEED	800-1900 RPM			
AIR PRESSURE	2.62 mmH2O (Maximum)			
AIRFLOW	64.5 CFM (Maximum)			
ACOUSTIC NOISE	17 - 28.3 dB			
LOCKED CURRENT	>= 0.05mA			
BEARING TYPE	Fluid Dynamic Bearing (FDB)			
OPERATION VOLTAGE	DC 12V & 5V			
START-UP VOLTAGE	DC 6.0V			
INPUT CURRENT	0.22A(FAN) / 0.66A (LED)			
INPUT POWER	5.94Watt			
WARRANTY	2 years			

## Additional Information

---

Brand	Lian-Li
SKU	UF-AL120-3B
Weight	2.0000
Color	Black
Fan Dimensions	120mm
Fan Width	25mm
Fan RPM	1900
Fan CFM	58
Fan Noise (dB)	31
Vendor SKU/EAN	4718466010162

