

Performance-PCs.com

1701 R. J. Conlan Blvd. NE, Unit #5 Palm Bay, FL 32905, USA

Toll Free: 888-381-8222

www.performance-pcs.com sales@performance-pcs.com












Watch Our YouTube

\$14.99

# SilverStone FTF 6025 High performance Tiny Form Factor fans

Product Images

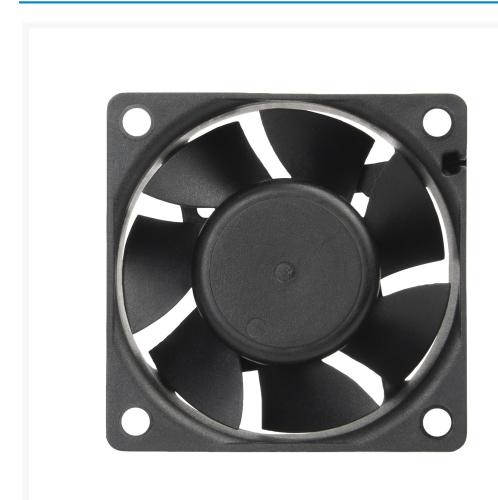





















# Description




## Balancing control and flexibility

FTF series fans comes supplied with 4pin PWM cable and speed reduction cable each, offering complete control for tailored performance or simply reduce the maximum fan speed to achieve better performance vs. noise level.





FTF Series fans are equipped with Hydro Dynamic Bearing (HDB) providing great reliability with high airflow, low noise operation and great life expectancy.









4pin PWM

2+1pin

2pin

#### Unique terminal interface

As FTF series fans are designed to be used in a wide array of applications, its connector interface design identifies all the users' needs which includes a 2+1pin sleeved cable and a 4pin PWM sleeved cable, meeting the requirements of all possible applications.

## **Features**

- Ideal small electronic equipment fans
- Optimized for airflow and pressure performance with low noise operation
- Hydro Dynamic Bearing (HDB) for improved life expectancy

# Specifications

## **SPECIFICATIONS**

Model No.	SST-FTF6025B
Material	PBT
Color	Black
Bearing	HDB
Connectors	4 pin
Rated Voltage	12V
Starting Voltage	4.5V
Rated Current	0.08 ±0.01A
Rated Power	0.96W
Speed	PWM: 0 – 3,600 RPM ±10% 12V: 3,600 RPM ±10% Speed reduction cable: 2,850 RPM ±10% 5V: 1,300 RPM ±10%
Airflow	12V: 15.45 CFM Speed reduction cable: 11.87 CFM 5V: 3.65 CFM
Static Pressure	12V: 3.55 mmH2O Speed reduction cable: 2.21 mmH2O 5V: 0.49 mmH2O
Noise Level	12V: 25.9 dBA Speed reduction cable: 20.2 dBA 5V: 15.5 dBA
Dimension	60mm (W) x 25mm (H) x 60mm (D) 2.36" (W) x 0.98" (H) x 2.36" (D)

4/19/24

## Additional Information

Brand	SilverStone Technology
SKU	SST-FTF6025B
Weight	0.1000
Color	Black
Fan Dimensions	60mm
Fan Width	20mm
Fan Connection	4-Pin PWM
Fan Voltage	12 VDC
Fan RPM	3600
Fan CFM	15
Fan Noise (dB)	25

