

Performance-PCs.com

1701 R. J. Conlan Blvd. NE, Unit #5 Palm Bay, FL 32905, USA

Toll Free: 888-381-8222

www.performance-pcs.com sales@performance-pcs.com













Watch Our YouTube

Raijintek EOS 12 RBW ADD (Addressable LED) -Two Pack

Special Price \$23.07 was \$32.95

Product Images














Short Description

RAIJINTEK EOS 12 RBW ADD series, 12025 PWM fan, continues company's innovative design and providing advanced features & additional value to end users. With RJK ARGB-PWM CONTROL SET (for 3 pack), you can set your EOS 12 RBW ADD fans to stun with fading, breathing, blinking and single color LED modes.

Description




INTRODUCTION


RAIJINTEK EOS 12 RBW ADD series, 12025 PWM fan, continues company's innovative design and providing advanced features & additional value to end users. With RJK ARGB-PWM CONTROL SET (for 3 pack), you can set your EOS 12 RBW ADD fans to stun with fading, breathing, blinking and single color LED modes. The EOS 12 series combines optimized Nine fan blade design to provide high-volume air delivery with less noise and turbulence, Hydraulic Bearing with Low-Noise Design, and Anti-Vibration rubber pads on all corners. Standard with LEDs incorporated with fan blades, EOS 12 series is not only insuring your case to be the center of attraction and a spot light to chassis, but its optimized fan blade and housing design also provide outstanding air flow and cooling performance for your PC's motherboard and CPU.






Features

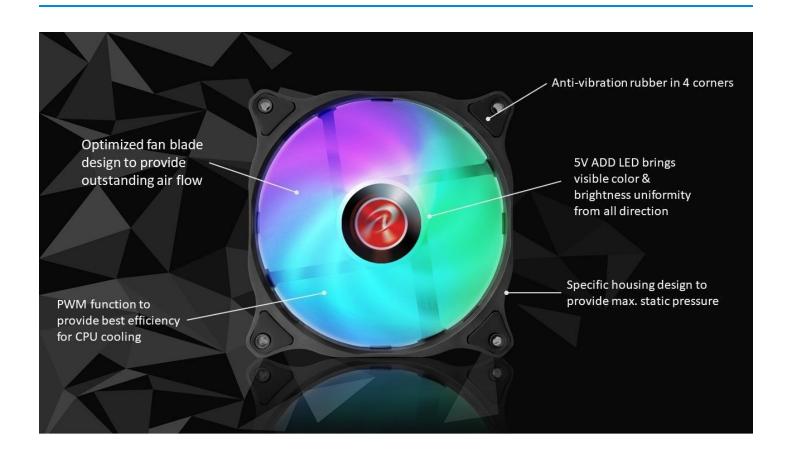

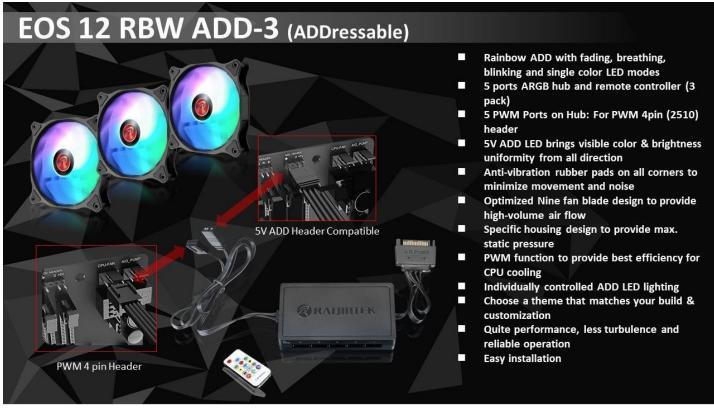

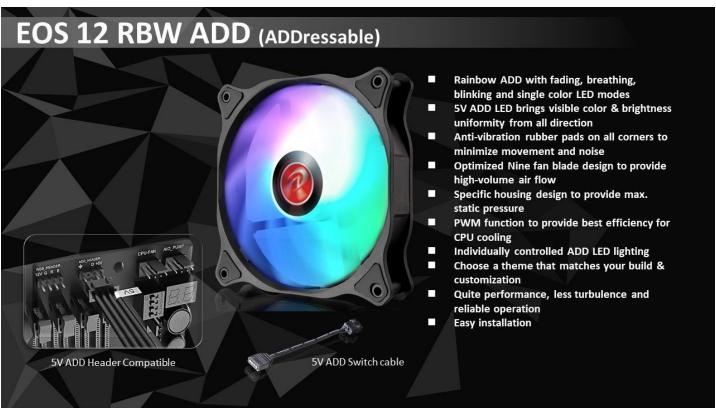

Specifications

4/23/24

SPECIFICATION			
	505 10 000 100	505 10 00W ADD 0	505 12 PRW 1 PR 2
Product Name	EOS 12 RBW ADD-1	EOS 12 RBW ADD-2	EOS 12 RBW ADD-3
Product Number	OR40B00191	OR40B00215	0R40B00192
Dimension [W×H×D]	120×120×25 mm	120×120×25 mm	120×120×25 mm
Voltage Rating	12V	12V	12V
Starting Voltage	7V	7V	7V
Speed	800~1800 R.P.M.	800~1800 R.P.M.	800~1800 R.P.M.
Bearing Type	Hydraulic Bearing	Hydraulic Bearing	Hydraulic Bearing
Air Flow	75 CFM [Max.]	75 CFM [Max.]	75 CFM [Max.]
Air Pressure	2.3 mmH2O [Max.]	2.3 mmH2O [Max.]	2.3 mmH2O [Max.]
Life Expectance	40,000 hrs	40,000 hrs	40,000 hrs
Noise Level	28 dBA [Max.]	28 dBA [Max.]	28 dBA [Max.]
Connector	5V ADD Header, PWM 4pin Header	5V ADD Header, PWM 4pin Header	5V ADD Header, PWM 4pin Header
Rated Current	0.17A±20%	0.17A±20%	0.17A±20%
Power consumption	2.1W±20%	2.1W±20%	2.1W±20%
LED Rated Current	0.35A [Max.]	0.35A [Max.]	0.35A [Max.]
LED Power consumption	1.8W [Max.]	1.8W [Max.]	1.8W [Max.]
Fan Q'ty	1 pcs	2 pcs	3 pcs

Additional Information

Brand	Raijintek
SKU	RJK-0R40B00215
Weight	1.0000
Color	Black
Fan Dimensions	120mm
Fan Width	25mm
Fan Connection	4-Pin PWM
Fan Voltage	12 VDC
Fan RPM	1800
Fan Noise (dB)	28
LED Color	Addressable/Digital RGB
Special Price	\$23.07



7