



# Rajintek PONOS TG4 (tempered glass front)

Special Price

**\$66.47** was  
**\$94.95**

## Product Images





## Short Description

---

Design Art in its best by RAIJINTEK – Introducing the PONOS Mid tower chassis, designed to install high-end components. PONOS will be available in two versions: 4.0mm tempered glass (side and front) and full mesh version to focus on the airflow. PONOS is a Mid tower chassis but with support up to EEB motherboards, it give you expandability for the latest PC hardware and liquid cooling solutions, supports up to 120/240/280/360mm radiators at the front, 120/240/280mm radiators at the top, it also comes with magnetic Dust filters for both the top and bottom.

## Description

---



# PONOS TG4/MS4

Mid Tower with Great expandability



TG4

MS4

## INTRODUCTION

Design Art in its best by RAIJINTEK – Introducing the PONOS Mid tower chassis, designed to install high-end components. PONOS will be available in two versions: 4.0mm tempered glass (side and front) and full mesh version to focus on the airflow. PONOS is a Mid tower chassis but with support up to EEB motherboards, it give you expandability for the latest PC hardware and liquid cooling solutions, supports up to 120/240/280/360mm radiators at the front, 120/240/280mm radiators at the top, it also comes with magnetic Dust filters for both the top and bottom. Tool free, removable HDD cages, for all combination of special technical features but in unbelievable price. PONOS is the best chassis to getting start with your designer built.






## Features



## VGA Card


Up to  
390mm

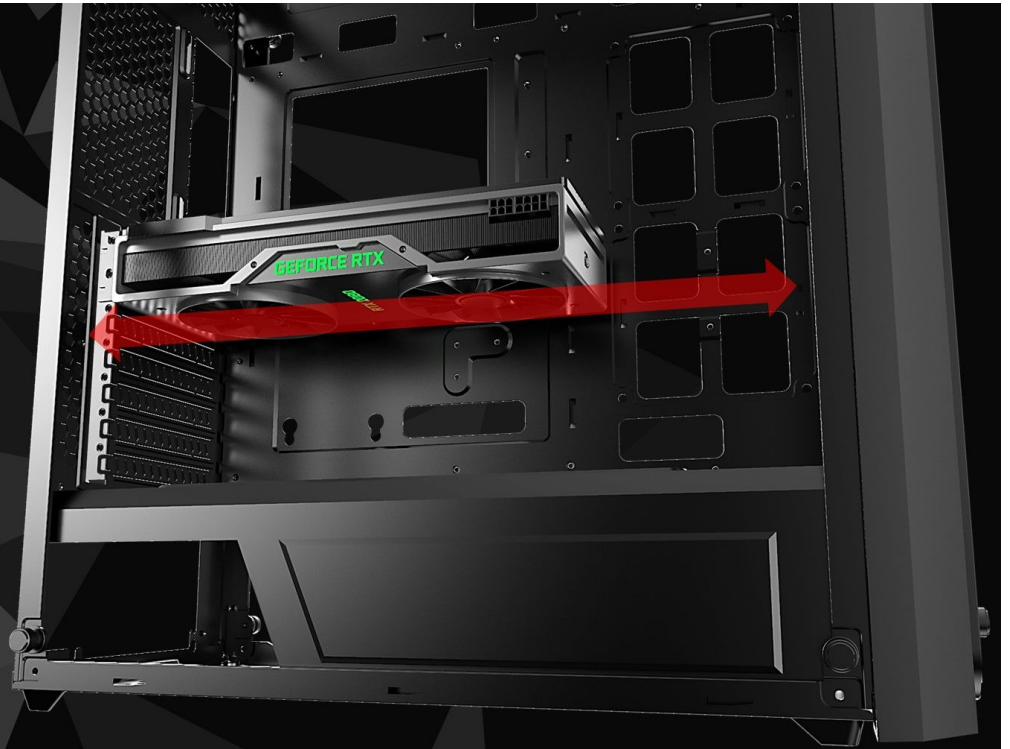

## Mother Board

Support up to EE-B

- EE-B (305x330mm)
- E-ATX (305x330mm)
- Standard ATX (305x244mm)
- Micro-ATX (244x244mm)
- Mini-ITX (170x170mm)

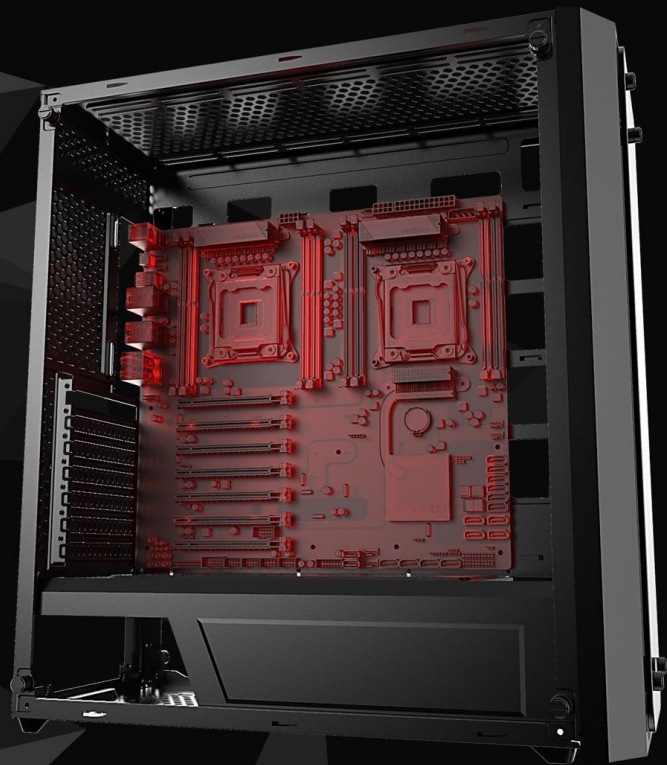



## Radiator - Top

- ① 120 Radiator 65mm thickness
- ② 140 Radiator 65mm thickness
- ③ 240 Radiator 65mm thickness
- ④ 280 Radiator 65mm thickness



## Radiator - Front

- ① 120 Radiator 30mm thickness
- ② 140 Radiator 30mm thickness
- ③ 240 Radiator 30mm thickness
- ④ 280 Radiator 30mm thickness
- ⑤ 360 Radiator 30mm thickness



# Cooling Fan

Top: 120mm x3 or 140mm x2 (option)

Front: 12025 ARGB x3 **(Pre-installed)**

MB tray: 120mm x 2 (option)

Rear: 12025 ARGB x1 **(Pre-installed)**



- 1 Power button
- 2 Reset button  
Change the LED mode **(not plug in the motherboard)**

**Note\*** PCB control board are included, Six 5V-ARGB connector in total.

**Note\*** PCB control board also has the 5V ADD header to plug in to the motherboard **push the button 2 (3sec) sync with the motherboard**

- 3 USB 3.0 x 1
- 4 USB 2.0 x 2
- 5 HD Audio

## IO Panel







## Specifications



## SPECIFICATION

Product Name	PONOS TG4	PONOS MS4
Product Number	OR20B00198	OR20B00197
Dimension [W×D×H]	210×442×485 mm	210×442×485 mm
Weight	7.2 kg [N.W.] 8.5 kg [G.W.]	7.2 kg [N.W.] 8.5 kg [G.W.]
Material	SPCC 0.6mm	SPCC 0.6mm
Color	Coating Black	Coating Black
M/B Support	EEB; E-ATX; ATX; M-ATX; Mini-ITX	EEB; E-ATX; ATX; M-ATX; Mini-ITX
Drive Bay	3.5"×3 + 2.5"×2 or 2.5"×5	3.5"×3 + 2.5"×2 or 2.5"×5
Expansion Slot	PCI Slots ×7	PCI Slots ×7
I/O Panel	USB3.0×1, USB2.0×2, HD Audio×1	USB3.0×1, USB2.0×2, HD Audio×1
Power Supply	PS/2 [Internal Bottom-mount]	PS/2 [Internal Bottom-mount]
Fan Q'ty	Top: 120mm×3 or 140mm×2 [Option] Front: 12025 ARGB Fan×3 [Pre-installed] MB tray: 120mm×2 [Option] Rear: 12025 ARGB Fan×1 [Pre-installed]	Top: 120mm×3 or 140mm×2 [Option] Front: 12025 ARGB Fan×3 [Pre-installed] MB tray: 120mm×2 [Option] Rear: 12025 ARGB Fan×1 [Pre-installed]
Radiator Q'ty	Top: 120/140/280/360mm [option] Front: 120/140/280/360mm [option] MB tray: 120/240mm [option] Rare: 120mm [option]	Top: 120/140/280/360mm [option] Front: 120/140/280/360mm [option] MB tray: 120/240mm [option] Rare: 120mm [option]
CPU Cooler Height	165mm [Max.]	165mm [Max.]
Graphic Card Length	390mm [Max.]	390mm [Max.]
Side Panel	4.0mm Tempered Glass	4.0mm Tempered Glass
Front Panel	Glass	Mesh

## PONOS TG4/MS4 12025 FAN

Dimension [W×H×D]	120×120×25 mm
Voltage Rating	12V
Starting Voltage	6V
Speed	1100 ±10% R.P.M.
Bearing Type	Hydraulic Bearing
Air Flow	41.3 CFM [Max.]
Air Pressure	0.98 mmH2O [Max.]
Life Expectance	40,000 hrs
Noise Level	18.5 dBA [Max.]
Connector	3 pin; 5V ADD 4 pin header
LED Rated Current	0.12A ±0.02A
Power Consumption	1.44W
Fan Q'ty	4 pcs

## Contents:

- PONOS TG4 or MS4 × 1
- Screw #6-32 L6 × 17 (MB/PCI Card/3.5"HDD)
- Screw M3 L9.5 × 1 (2.5"SSD/HDD)
- Screw #6-32 L8.5 × 4 (3.5"HDD)
- Screw M3 L5 × 8 (2.5"SSD)
- Screw 6-32 L27.5 × 8 (FAN)

- Stand-off × 3 (MB)
- Cable Tie × 10
- Installation Guide × 1

## Additional Information

Brand	Raijintek
SKU	RJK-OR20B00198
Weight	35.0000
Color	Black
Chassis Form Factor	Full Tower
Side Panel	Window
Motherboard Support	ATX
Material	Steel
Special Price	\$66.47

