


Koolance PMP-400 High-flow DDC Pump

\$84.49

Product Images

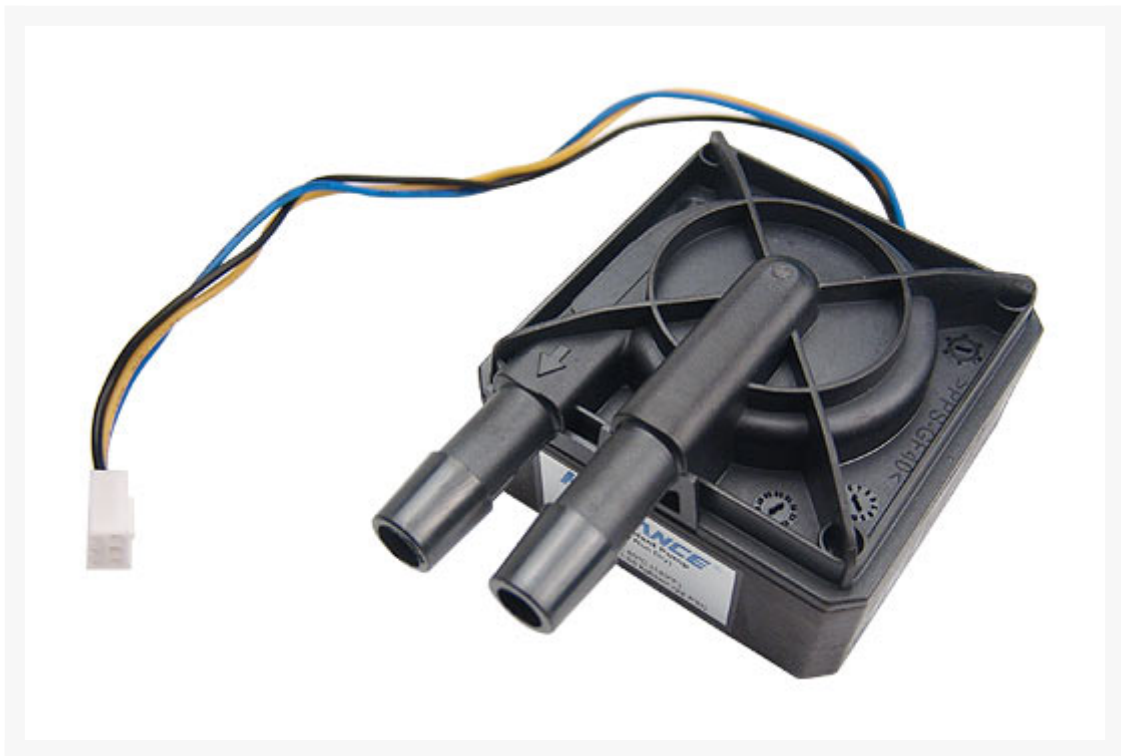

Short Description

The PMP-400 is a high-pressure pump with a very low profile format. It is used in multiple Koolance systems, such as the PC4-1000, RP-1000, and TNK-400 products.

Description

The PMP-400 is a high-pressure pump with a very low profile format. It is used in multiple Koolance systems, such as the PC4-1000, RP-1000, and TNK-400 products.

Specifications

- Maximum Flow Rate: 8.7 L/min (2.3 gal/min)
- Maximum Head Pressure: 7m (23ft)
- Motor: Brushless DC, electronically commutated, spherical motor
- Expected Lifetime: 50,000 hrs. MTBF (5.7 years)
- Power Consumption (at max): 20W
- Voltage Range: 8 to 13.2 VDC
- Startup Voltage: 9 to 13.2 VDC
- Maximum System Pressure: 1.5 kgf/cm2 (22 PSI)
- Maximum Temperature: 60°C (140°F)
- Electrical Connector: 3-pin fan header with tachometer speed signal
- Hose Connections: 10mm (3/8") ID hose barbs
- Weight: 198g (7oz)

Additional Information

Brand	Koolance
SKU	PMP-400
Weight	2.0000
Color	Black
Pump Type	DDC
Pump Voltage	12 VDC

