




Techflex Flexo Wrap Hook and Loop Expandable Sleeving 2" - Black

\$3.50

Product Images



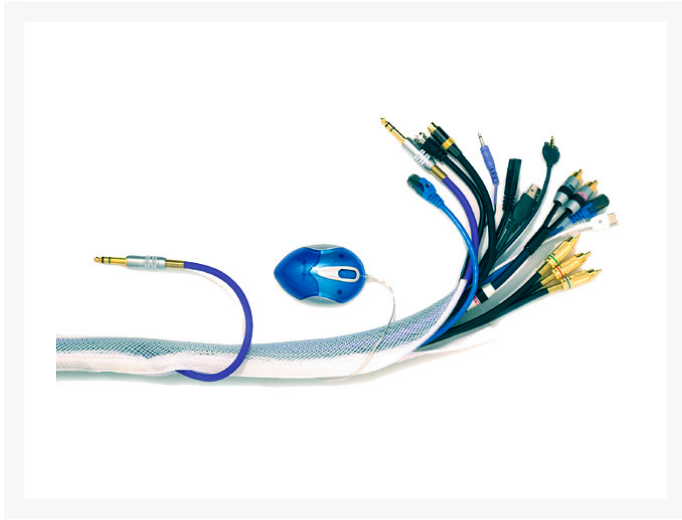

Short Description

FLEXO WRAP (FW) is an exclusive product engineered and manufactured by Techflex. FW provides the perfect solution to a wide variety of unique application challenges.

Flexo wrap cable sleeve has a hook and loop fastener which makes it easy for the users to insert more wires and cables without complicating the existing connections over the entire bundle.

Description

FLEXO WRAP (FW) is an exclusive product engineered and manufactured by Techflex. FW provides the perfect solution to a wide variety of unique application challenges.

Flexo wrap cable sleeve has a hook and loop fastener which makes it easy for the users to insert more wires and cables without complicating the existing connections over the entire bundle.


This premium-grade cable sleeve is manufactured from polyethylene terephthalate monofilament material which has a high-temperature resistance. Its open expandable open weave design allows it to conform to a wide variety of bundle diameters even irregular shapes.

The color matched hook and loop closure provides for easy on and off installation, as well as instant and convenient access for harness break-outs and rework of any specific section along the entire length of the run. Combined with the expandable, open weave design, FW will conform to a wide variety of bundle diameters and will wrap around irregular shapes.

All grades of FW cut cleanly with a hot knife.

This product is sold and priced BY THE FOOT. The is cut to order and non-returnable for any reason.

Installation:

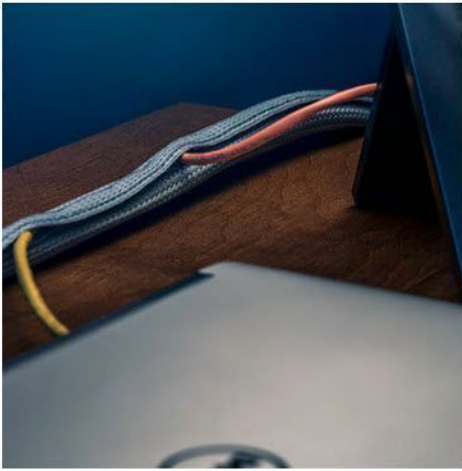

Expandable Open Weave Sleeve with Durable Hook & Loop

FLEXO WRAP (FW) is an exclusive product engineered and manufactured by Techflex. FW provides the perfect solution to a wide variety of unique application challenges. The color matched hook and loop closure provides for easy on and off installation, as well as instant and convenient access for harness break-outs and rework of any specific section along the entire length of the run. Combined with the expandable, open weave design, FW will conform to a wide variety of bundle diameters and will wrap around irregular shapes.

Flexo Wrap is designed for quick and easy management of wire, cable and hose assemblies. Just separate the hook and loop fasteners along the edge of the material and slip the entire length of FW around or under your harness or component assembly. The wide expandability range allows FW to easily fit around odd-shaped connectors and gently constrict around the diameter of your wires. When the FW is in place, simply seal the hook and loop along the edges.



Certifications:



Features

Features:

- Heavy Duty Hook and Loop Closure for Frequent Access
- Expands To Fit Over Inline Connectors and Splices
- Halogen Free
- Temp Range -75°C to 125°C
- Melt Temp 230°C

Specifications

Specifications:

Techflex makes every effort to ensure accuracy and completeness when describing the technical properties of our products. Customers are encouraged to test and evaluate the products for their own unique requirements.

Nominal Size	Product Part #	Hook & Loop Width	Standard Spool Put-Ups		Available Colors	Lbs/100'
			Bulk Spool	Shop Spool		
1/2"	FWN0.50	1/4"	100'	20'	BK, WH, GY & BE	1.30
3/4"	FWN0.75	5/8"	100'	15'	BK, WH, GY & BE	1.80
1 1/4"	FWN1.25	5/8"	100'	12'	BK, WH, GY & BE	2.30
2"	FWN2.00	5/8"	100'	10'	BK, WH, GY & BE	3.20
2 1/2"	FXN2.50BK	5/8"	100'	10'	BK	3.75

Physical Properties	
Monofilament Thickness (ASTM D-204)	.010
Flammability Rating	
Recommended Cutting	Hot Knife
Colors	4
Wall Thickness	.025
Tensile Strength - Yarn (ASTM D-2265) lbs.	7.5
Abrasion Resistance	Medium
Specific Gravity	1.38
Moisture Absorption % (ASTM D-570)	.1 - .2

Hard Vacuum Data (ASTM E-595 at 10-5 torr)	
TML	.19
CVCM	.00
WVR	.16
Smoke D-Max (ASTM E-662)	56
Outgassing	Medium
Oxygen Index (ASTM D-2863)	21
Operating Temperatures	
Minimum Continuous	-103°F/-75°C
Maximum Continuous (MIL-I-23053)	257°F/125°C
Melt (ASTM D-2117)	482°F/250°C

Chemical Resistance	1=No Effect	2=Little Effect	3=Affected	4=More Affected	5=Severely Affected
Aromatic Solvents		2			
Chlorinated Solvents			3		
Strong Bases		2			
Hydraulic Fluid (MIL-H-5606)		1			
De-Icing Fluid (MIL-A-8243)		1			
Strong Oxidants		2			
UV Light		1			
Fungus (ASTM G-21)		1			
Aliphatic Solvents					1
Weak Bases					1
Salt Water (O-S-1926)					1
Lubricating Oil (MIL-A-8243)					1
Strong Acids					3
Esters/Keytones					1
Petroleum					1
Salts					1

Halogen Free	Yes
SVHC	None

RoHS	Yes
UL/CSA	Yes

Additional Information

Brand	Techflex
SKU	FWN2.00BK
Weight	0.0700
Color	Black
Sleeve Size	2"
Material	PET

