

Performance-PCs.com

1701 R. J. Conlan Blvd. NE. Unit #5 Palm Bay, FL 32905, USA

Toll Free: 888-381-8222

www.performance-pcs.com sales@performance-pcs.com












# Bitspower BP-DBRWP-C47 G1/4" Deep Bold Red Multi-Link Adapter- Set of 2

**Special Price** \$10.16 was \$11.95

## **Product Images**

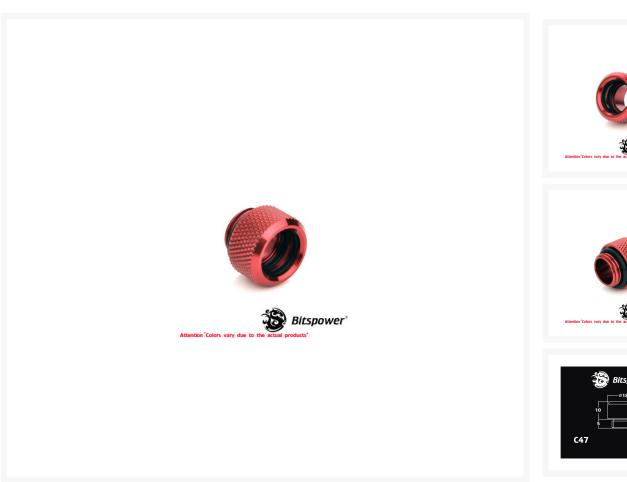



## **Short Description**

The Bitspower G1/4" Multi-Link hard tube adapters. Bitspower offers a simple way to make SLI/Cross-fire link

in a easy and reliable way. The C47 standard size connectors and the C48 the mini version are the perfect way to connect your VGA water blocks in SLI. This is definitely the best way to make link between VGA Blocks which is very different from the past. You can see color of coolant pass through your VGA Block! Includes 2 pieces!

## Description

The Bitspower G1/4" Multi-Link hard tube adapters. Bitspower offers a simple way to make SLI/Cross-fire link in a easy and reliable way. The C47 standard size connectors and the C48 the mini version are the perfect way to connect your VGA water blocks in SLI. This is definitely the best way to make link between VGA Blocks which is very different from the past. You can see color of coolant pass through your VGA Block! Includes 2 pieces!

#### Please note:

- \*\*\* Bitspower reserves the right to change the product design and interpretations. These are subject to change without notice. Product colors and accessories are based on the actual product. \*\*\*
- \*\*\* From 15th March 2018, all of our installation guides will be provided electronically via an easy-to-use QR code attached to the packaging. \*\*\*
- \*\*\* Before filling in the water, please make sure all the components are installed correctly. To prevent any leakage which may damage the PC components, please perform a 24-hour leaking test with only the pump connected to the power supply. \*\*\*
- \*\*\* When using the leak tester on a water cooling loop, in order to avoid product damage due to excessive pressure, the input pressure should not exceed 0.5kg/cm2 (bar), and do not over 30 second. The leak tester must not be used when there is water in the loop or when the pump is running. If the product is damaged due to excessive pressure or incorrect use, Bitspower's product warranty will be null and void, and the cost of any damage to the hardware will be borne by the customer. \*\*\*

#### **Features**

#### Features:


- True Hi-Flow.
- Hi-Quality Brass Material.
- High Quality E-Plated Finished
- Multi-Length Application.
- Compatible With Crystal Link Tube Series
- RoHS Compliant.

### **Specifications**

Specifications:

- Thread: G1/4"
- Thread Length: 5mm
- Includes 2 fittings!
- For 10mm ID/12mm OD hard tubing (Crystal Link Tube Series)

#### Diagram:

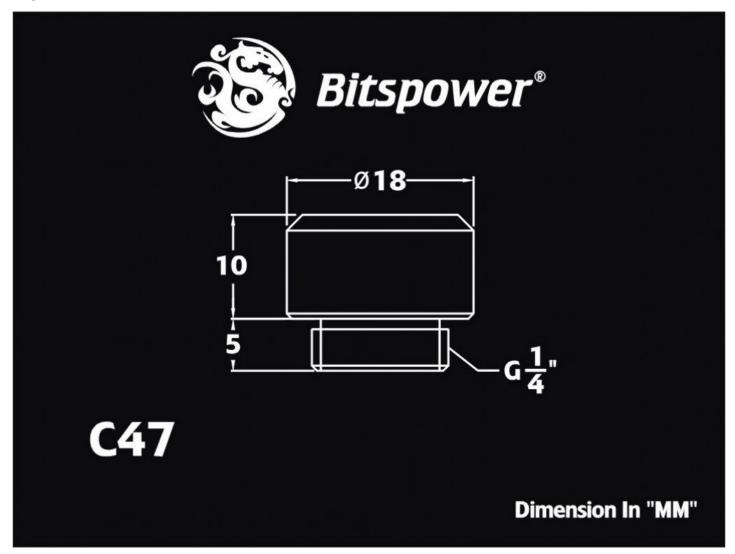

## Additional Information

Brand	Bitspower
SKU	BP-DBRWP-C47
Weight	0.2000
Special Order	No
Fitting Type	Rigid Compression
Fitting Size	10mm/12mm
Fitting Angle	Straight
Fitting Finish	Red
Vendor SKU/EAN	4711946747862
Special Price	\$10.16

