





# Thermaltake Contac 30 Universal CPU Cooler - 2x Anti-vibration Mounts, 8mm Heat Pipes - Blue LED

\$29.95

## Product Images





## Short Description

---

### Product Details:

Thermaltake CLP0579 Contact 30 CPU Cooler

The Thermaltake CLP0579 Contact 30 CPU Cooler carries on the legacy of providing a great balance of performance and noise level during high and low speed operations. The Thermaltake CLP0579 Contact 30 CPU Cooler has a silent operation with a low noise level. Moreover, the three high efficiency 8mm heat-pipes provide seamless heat dissipation between CPU surface and cooler. If you're disappointed with the noise from your current CPU cooler, fed up with higher temperatures or concerned that your behemoth two pound heatsink is going to damage your motherboard or processor, Thermaltake has your solution! Purchase the Thermaltake CLP0579 Contact 30 CPU Cooler today!

Features:

- High compatibility, no extra cost for future upgrading CPU
- Universal back-plate design increases the stability of installation
- Blue LED fan with PWM function automatically adjusts the fan speed according to the CPU temperature
- Including 2 sets of anti-vibration soft mounts allow users to upgrade the second 120mm fan
- 3pcs of 8mm heat pipes with direct contact technology accelerates thermal conductivity to increase cooling capability.


## DETAIL INFORMATION



3 Direct Contact Heat-pipes



120mm PWM fan

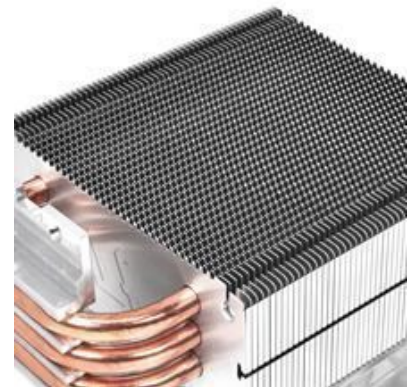

AL Fin



Anti-vibration soft mounts



Universal Sicket Bracket



Application View

Specifications:

**Intel® Latest 6-Core Processors**

Intel® Core i7 Extreme (Socket LGA1366)  
Intel® Core i7 (Socket LGA1366 & LGA1155/1156)  
Intel® Core i5 / i3 (Socket LGA1155/1156)  
Intel® Core 2 Extreme / Quad / Duo (Socket LGA775)  
Intel® Pentium D / 4 (Socket LGA775)  
Intel® Pentium (Socket LGA775)  
Intel® Celeron D (Socket LGA775)  
Intel® Celeron (Socket LGA775)

Compatibility

**AMD® Latest 6-Core Processors**

AMD® Phenom II X6 / X4 / X3 / X2 (Socket AM3/AM2+)  
AMD® Phenom X4 / X3 (Socket AM3/AM2+)  
AMD® Athlon II X4 / X3 / X2 (Socket AM3)  
AMD® Athlon 64 FX / X2 (Socket AM2/939)  
AMD® Athlon 64 (Socket AM2/939/754)  
AMD® Sempron (Socket AM2/939/754)

\* Supports All CPUs up to 130W TDP

---

Heatsink Dimension  
120 (L) x 103 (W) x 159.5 (H) mm  
4.72 (L) x 4.06 (W) x 6.28 (H) inch

---

Heatsink Material  
Alumium Fins & Aluminum Extrusion Cover

---

Heatpipe  
Ø 8 mm (x3)

---

Fan Dimension  
Ø 120 x 25 mm

---

Fan Speed  
800 ~ 2,000 RPM

---

Bearing Type  
----

---

Noise Level  
15 ~ 33.2 dBA

---

Max. Air Flow  
29.434 ~ 72.084 CFM

---

Max. Air Pressure  
0.356 ~ 1.985(mmH<sub>2</sub>O)

---

LED Fan  
Blue LED

---

Power Connector  
4 Pins (PWM)

---

Rated Voltage	12 V
Started Voltage	6 V
Rated Current	0.04 A (Max 0.19 A)
Power Input	0.48 W (Max 2.28 W)
MTBF	30,000 Hours
Weight	563 g

## Description

---

### Thermaltake CLP0579 Contact 30 CPU Cooler

The Thermaltake CLP0579 Contact 30 CPU Cooler carries on the legacy of providing a great balance of performance and noise level during high and low speed operations. The Thermaltake CLP0579 Contact 30 CPU Cooler has a silent operation with a low noise level. Moreover, the three high efficiency 8mm heat-pipes provide seamless heat dissipation between CPU surface and cooler. If you're disappointed with the noise from your current CPU cooler, fed up with higher temperatures or concerned that your behemoth two pound heatsink is going to damage your motherboard or processor, Thermaltake has your solution! Purchase the Thermaltake CLP0579 Contact 30 CPU Cooler today!

## Features

---

- High compatibility, no extra cost for future upgrading CPU
- Universal back-plate design increases the stability of installation
- Blue LED fan with PWM function automatically adjusts the fan speed according to the CPU temperature
- Including 2 sets of anti-vibration soft mounts allow users to upgrade the second 120mm fan
- 3pcs of 8mm heat pipes with direct contact technology accelerates thermal conductivity to increase cooling capability.


## DETAIL INFORMATION



3 Direct Contact Heat-pipes



120mm PWM fan

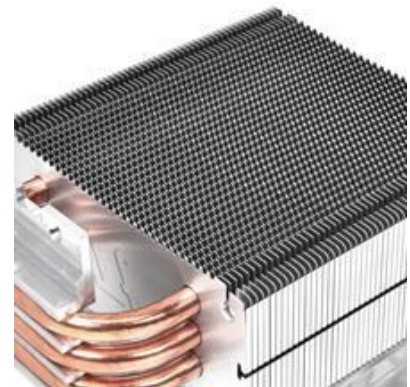

AL Fin



Anti-vibration soft mounts



Universal Socket Bracket



Application View

# Specifications

---

**Intel® Latest 6-Core Processors**  
Intel® Core i7 Extreme (Socket LGA1366)  
Intel® Core i7 (Socket LGA1366 & LGA1155/1156)  
Intel® Core i5 / i3 (Socket LGA1155/1156)  
Intel® Core 2 Extreme / Quad / Duo (Socket LGA775)  
Intel® Pentium D / 4 (Socket LGA775)  
Intel® Pentium (Socket LGA775)  
Intel® Celeron D (Socket LGA775)  
Intel® Celeron (Socket LGA775)

Compatibility

**AMD® Latest 6-Core Processors**  
AMD® Phenom II X6 / X4 / X3 / X2 (Socket AM3/AM2+)  
AMD® Phenom X4 / X3 (Socket AM3/AM2+)  
AMD® Athlon II X4 / X3 / X2 (Socket AM3)  
AMD® Athlon 64 FX / X2 (Socket AM2/939)  
AMD® Athlon 64 (Socket AM2/939/754)  
AMD® Sempron (Socket AM2/939/754)

\* Supports All CPUs up to 130W TDP

---

Heatsink Dimension  
120 (L) x 103 (W) x 159.5 (H) mm  
4.72 (L) x 4.06 (W) x 6.28 (H) inch

---

Heatsink Material  
Aluminum Fins & Aluminum Extrusion Cover

---

Heat pipe  
Ø 8 mm (x3)

---

Fan Dimension  
Ø 120 x 25 mm

---

Fan Speed  
800 ~ 2,000 RPM

---

Bearing Type  
----

---

Noise Level  
15 ~ 33.2 dBA

---

Max.  
Air  
Flow 29.434 ~ 72.084 CFM

---

Max.  
Air  
Pressure 0.356 ~ 1.985(mmH<sub>2</sub>O)

---

LED  
Fan Blue LED

---

Power  
Connector 4 Pins (PWM)

---

Rated  
Voltage 12 V

---

Start  
ed  
Voltage 6 V

---

Rated  
Current 0.04 A (Max 0.19 A)

---

Power  
Input 0.48 W (Max 2.28 W)

---

MTBF 30,000 Hours

---

Weight 563 g

---



## Additional Information

---

Brand	Thermaltake
SKU	CLP0579-D
Weight	2.0000
Material	Aluminum
Fan Dimensions	120mm
Fan Connection	4-Pin PWM
LED Color	Blue

