

Performance-PCs.com

1701 R. J. Conlan Blvd. NE, Unit #5 Palm Bay, FL 32905, USA

Toll Free: 888-381-8222

www.performance-pcs.com sales@performance-pcs.com






Follow Us Twitter



Watch Our YouTube



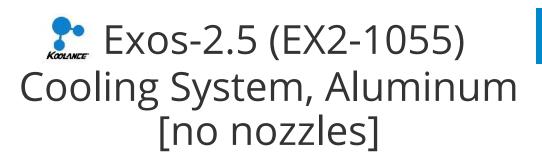

\$501.99

Product Images









3/13/24

Short Description

The Exos-2.5 possesses triple 120mm fans and an extended heat exchanger for approximately 1000W of cooling capacity. Its powerful PMP-400 pump also better assists systems with multiple blocks, splitters, and other components that naturally reduce flow and pump pressure.

Description

(NOTE: EX2-1055 is the replacement for the earlier EX2-1050BK. It includes newer Koolance 10K Ohm temperature sensors and is available with RoHS compliance.)

The Exos-2.5 possesses triple 120mm fans and an extended heat exchanger for approximately 1000W of cooling capacity. Its powerful PMP-400 pump also better assists systems with multiple blocks, splitters, and other components that naturally reduce flow and pump pressure.

The Exos-2.5 features rear G 1/4 BSP threaded inlet and outlet nozzle sockets (nozzles are not included). This allows any Koolance G 1/4 BSP nozzle or threaded quick-disconnect to be added to the unit. Like all Exos systems, the Exos-2.5 will connect with any PC through a standard rear card slot. This is ideal to avoid any modification to the computer chassis.

NOTE: The included Exos Slot Adapter will accommodate tubing up to 3/8" (10mm) ID, 1/2" (13mm) OD. If using 1/2" (13mm) ID tubing, Koolance recommends the BKT-PCI-G with your preferred nozzles.

Components Required

Cooler kits such as the CPU, hard drive, and video/motherboard chipset are *not included* with Koolance systems. To operate the system at minimum, a CPU cooler is required. Other liquid components (such as the radiator, pumps, and LED display) come pre-installed. For more information, please see How to Build a Koolance.

Features

- Variable pump speed via the front display
- Rear G 1/4 BSP inlet and outlet nozzle sockets
- Radiator fan speeds adjust automatically, or with 10 manual levels
- Blue reservoir LED lighting
- Top coolant fill plug
- Independently-variable alarm and safety shutdown temperatures on all three sensors!
- Adapted power connection does not require an AC power outlet
- Optional attachment strap for systems "on the go"

Specifications

Model	EX2-1055
Compatibility	ATX Computers
Materials	Aluminum Chassis & Heat Exchanger, Acrylic Faceplate, Acrylic Reservoir
Tubing Size, ID	1/2" (13mm), 3/8" (10mm), or 1/4" (6mm)
Product Dimensions (w/o Nozzles & Handles) WxHxD	8.4" x 3.75" x 22.2" (21.3cm x 9.5cm x 56.5cm)
Product Weight	7.4 pounds (3.4kg)

Components Included

Cooling unit (pump/reservoir, radiator, fans, control board, LED display, etc.), manual, slot interface adapter, rubber feet, 3×10^{-5} x temperature sensors

Additional Information

Brand	Koolance
SKU	EX2-1055
Weight	10.0000
Vga	AMD Radeon RX 6800XT Nitro+
Pump Type	DDC
Radiator Size	360 (3 x 120mm)
Radiator Thickness	30mm



3/13/24