





Channelz™ Thermaltake P6 Front Distribution Plate


\$299.95

Product Images




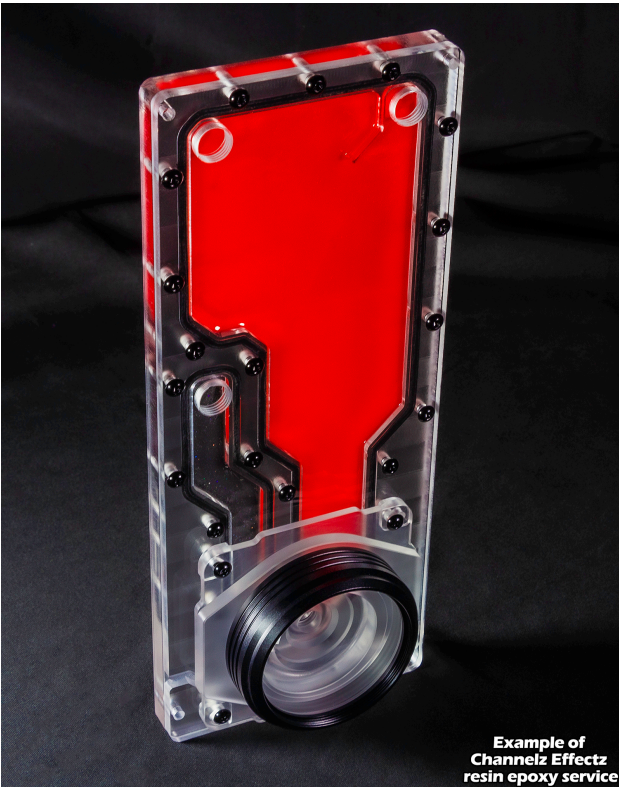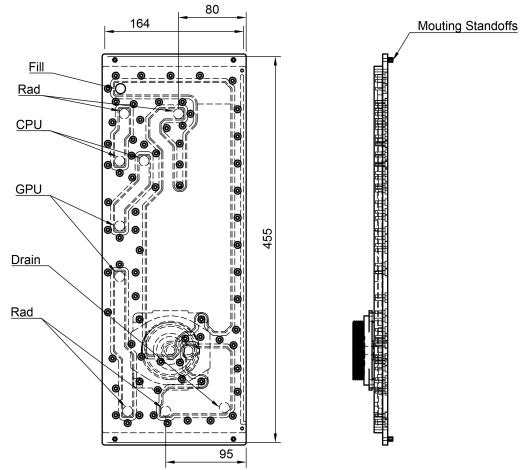


Example of Channelz Effectz resin epoxy service

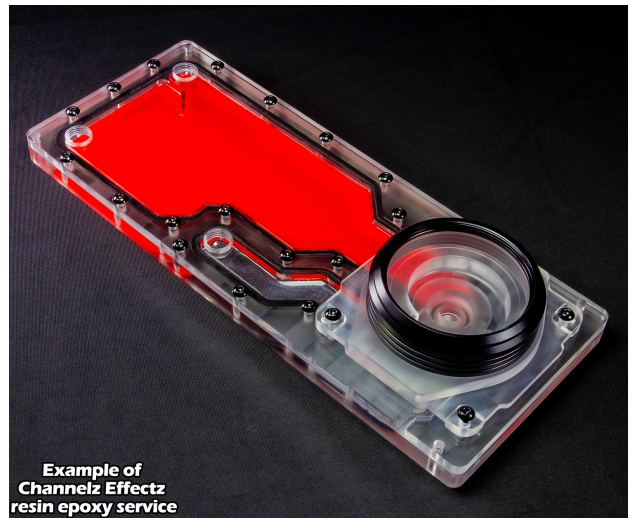


Example of Channelz Effectz resin epoxy service

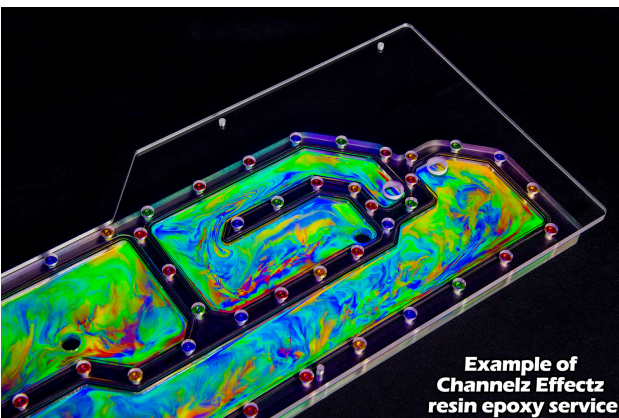

Example of Channelz Effectz resin epoxy service

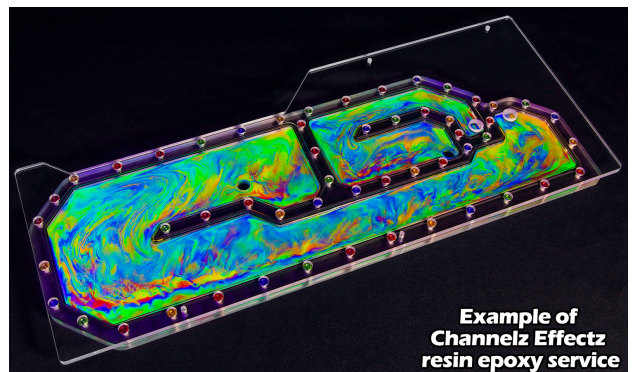

Example of Channelz Effectz resin epoxy service

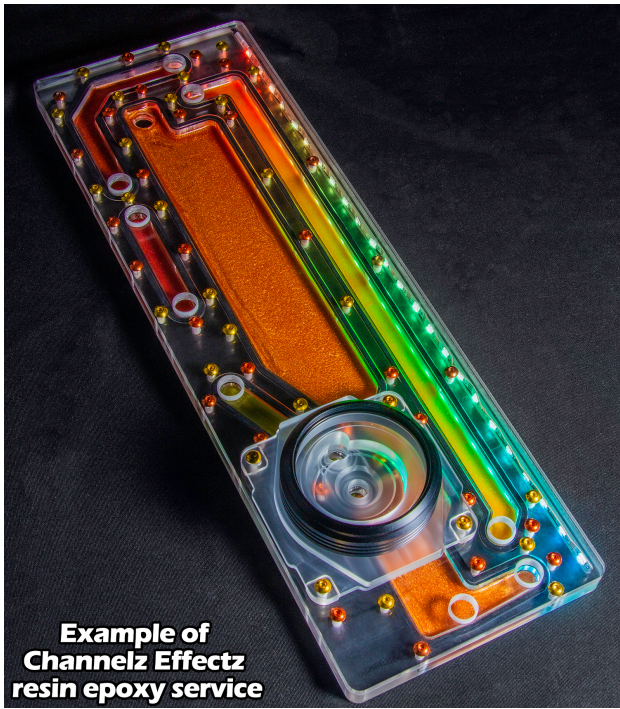

Short Description

Channelz™ Designed and manufactured in the USA by Performance PCs.



This Distroplate is specifically designed for the front of the thermaltake P6 case for easy tube routing between components. Featuring a unique design with 10 ports total it is designed to be used with a full loop and 2 radiators. The distroplate includes an option of D5 or DDC pump mount that can be used with any standard D5 or DDC Pump, and a D-RGB LED for stunning lighting effects.

Description

Designed and manufactured in the USA by Performance PCs.



This Distroplate is specifically designed for the front of the thermaltake P6 case for easy tube routing between components. Featuring a unique design with 10 ports total it is designed to be used with a full loop and 2 radiators. The distroplate includes an option of D5 or DDC pump mount that can be used with any standard D5 or DDC Pump, and a D-RGB LED for stunning lighting effects.

Recommended top rad : 30mm thickness

Clearance from side bracket to D5 pump : 105mm

Channelz Effectz Service

Tired of all that colored Coolant clogging up your loop but don't want to stick with some boring old clear coolant? Well Performance-PCs has you taken care of with their new Channelz Effectz Service! This service is a great way to add some color to your Channelz distribution plate without clogging your loop with pastel or mica filled coolants. We use an epoxy resin mixture that is safe for your loop and will certainly help that build POP. There is 30 different super vivid color options to choose from and we even added the ability for you to mix colors to give your loop its own style.

Features

Installation:

First remove the side glass panel on the case by loosening the 4 screws on each corner of the glass. Next on the side towards the front of the case remove the 2 brackets holding the front glass in. Once the glass is removed, loosen the 8 screws holding the front radiator bracket in and then remove the bracket. Finally you will need to remove 1 of the 2 front silver support rods that the side glass was mounted to, the screws are behind the back panel of the case.

Now install the 4 x M4 - M3 Adaptor standoffs into the distroplate and then insert the distroplate into the case lining the standoff up with the front holes that were used with the radiator bracket. Tighten down with M3 screws so the plate is now secure inside the case. You can now replace the silver support rod you removed earlier. Leave the front glass off until you are finished filling. Once the loop is ready you can replace the front glass and the 2 brackets that hold it in place.

Specifications

Specifications:

Material: Clear Cast Acrylic.
Fasteners: Stainless Steel Silver.
Stand Offs: Brass.
Gaskets: Silicone Black.
O-rings: Silicone Black and Clear.
Stop Fittings: Brass Black Powder coat.
Ports: x10. Inlets: x4 Outlets: x4. Fill: x1 Drain: x1
LED Strip: DRGB 5V Addressable.
Dimensions: Width: 164mm. Height 455mm.

Included Items:

Channelz Thermaltake P6 Front Distribution Plate: x1.
DRGB LED Strip: x1.
Stop Plug: x2
Mounting Fasteners: M4-M3 Standoff: x4.

Recommended top rad: 30mm thickness
Clearance from side bracket to D5/DDC pump: 105mm

Additional Information

Brand	PPCS
SKU	PPCS-DISTRO99
Weight	7.0000
Color	Clear
Reservoir Type	Distribution plate

