


Performance-PCs.com

1701 R. J. Conlan Blvd. NE, Unit #5 Palm Bay, FL 32905, USA

Toll Free: 888-381-8222








www.performance-pcs.com sales@performance-pcs.com

# EK-HDC Classic 14mm -Nickel

Special Price \$3.99 was \$4.99

#### **Product Images**

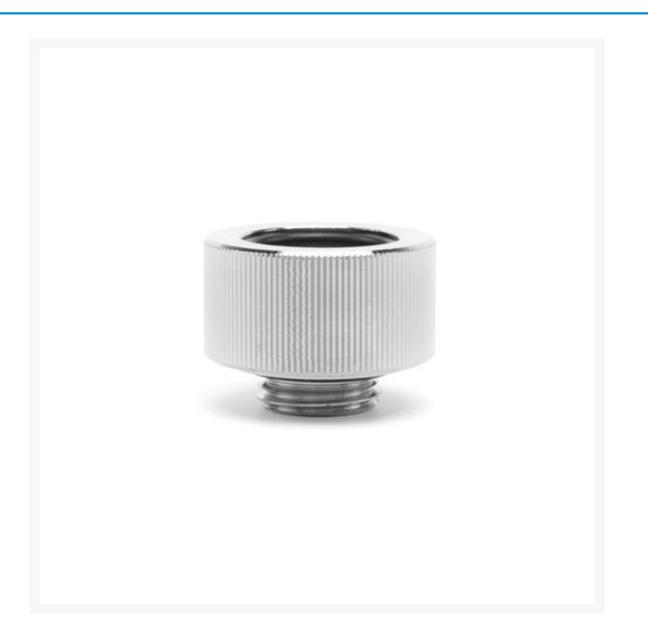

EK-HTC Classic 14 (*Hard Tubing Compression*) Fittings are 14mm hard-tube compression fittings designed for use with solid tubing such as Acrylic and PETG. With a high-quality finish, the EK-HTC Classic Fittings are an aesthetically appealing and secure option for your custom loop liquid cooling system. A non-intrusive, minimalistic look, with NO added branding at all.

#### Description

EK-HTC Classic 14 (*Hard Tubing Compression*) Fittings are 14mm hard-tube compression fittings designed for use with solid tubing such as Acrylic and PETG. With a high-quality finish, the EK-HTC Classic Fittings are an aesthetically appealing and secure option for your custom loop liquid cooling system. A non-intrusive, minimalistic look, with NO added branding at all.

The locking ring prevents solid tube to be pulled out of the fitting by compressing the rubber gasket underneath the ring. EK-HTC Classic fittings are available in the three most popular color options such as nickel, black and black nickel.

The barb and the ring are made of CNC machined brass and the seal is made quality rubber O-rings.

The base fitting surface is smooth and has no adequate gripping surface, but the inside of the bard is socketed with a 9mm hex Allen key pattern. It's highly recommended to use an Allen Key 9mm (purchased separately) to prevent skin damage to the fingertips while installing the fitting. Please, be advised not to use excessive force when attaching fitting barbs using Allen Key 9mm in order to prevent damage to other liquid cooling products!

These fittings have guaranteed compatible with all other EK Water Blocks liquid cooling products.

#### Specifications

Technical data:

- Thread: G1/4" BSP; 4.5mm male thread length
- Supported tube: 14mm OD
- Outer diameter of a fitting: 21mm
- Installed height: 12.5mm
- Compatible solid tubing: Acrylic, PETG, Copper, Brass, Stainless Steel

PLEASE NOTE:

- It's mandatory to use this fitting only with the correct sized tubing!
- Do not use excessive force when attaching fitting barbs using Allen Key 8mm in order to prevent water block damage!
- Do not use any tools to secure the locking ring to the fitting barb.
- This product should NOT be installed with any aluminum Fluid Gaming parts!

## Additional Info

G1/4

### Additional Information

Brand	EK Waterblocks
SKU	EK-HDC-CLASSIC-14MM-NK-D
Weight	0.1500
Special Order	No
Fitting Type	Rigid Compression
Fitting Size	14mm
Fitting Angle	Straight
Fitting Finish	Chrome
Vendor SKU/EAN	3831109818114
Special Price	\$3.99

