


Performance-PCs.com

1701 R. J. Conlan Blvd. NE, Unit #5 Palm Bay, FL 32905, USA

Toll Free: 888-381-8222

Like Us Facebook




\$238.95



www.performance-pcs.com sales@performance-pcs.com

# Watercool MO-RA3 420 LT - White

# Product Images

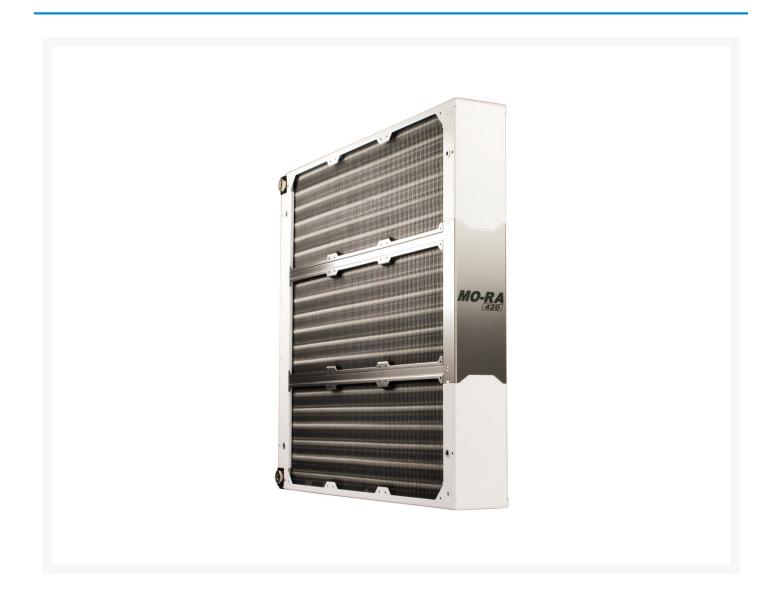

The MO-RA3 is a heat exchanger featuring excellent cooling performance and various possibilities of application. Its reliability allows for usage in workstation and server environments and it is sturdy enough for industrial applications. And, of course, it is powerful enough to cool even the hottest gaming PC. True to the slogan "there is no replacement for surface but more surface", the MO-RA3 uses 36 m copper tubing and 3.0 square meter of aluminium fins for excellent heat transfer from cooling fluid to ambient air.

#### Description

The MO-RA3 is a heat exchanger featuring excellent cooling performance and various possibilities of application. Its reliability allows for usage in workstation and server environments and it is sturdy enough for industrial applications. And, of course, it is powerful enough to cool even the hottest gaming PC. True to the slogan "there is no replacement for surface but more surface", the MO-RA3 uses 36 m copper tubing and 3.0 square meter of aluminium fins for excellent heat transfer from cooling fluid to ambient air.

The cooling fluid passes the 80 tubes in a four-time parallel layout. This design and the flow-optimised connection block ensure a low flow-resistance, despite the large size of the heat-exchanger. The connection block improves flexibility as well by providing G1/4" threads in three directions. The fins of the MO-RA3 have been optimised specifically for low-rpm fans. Their enormous surface and effective geometry guarantee excellent cooling performance.

#### Features

Possible fan configurations MO-RA3 420 LT Nine 140 x 140 x 25 mm fans MO-RA3 420 PRO

Eighteen 140 x 140 x 25 mm fans

Screw kits for fans of greater height are available.

The MO-RA3 LT allows mounting of fans on only one side, but the user may choose this side freely.

The MO-RA3 PRO allows mounting of fans on both sides, thus using twice as much fans, as the MO-RA3 LT. The double-sided mounting enables an effective push-pull operation.

Additional threads are integrated for accessories. Select from various grills, feet, and external mounting brackets.

The MO-RA3 is shipped ready to use, except for fans and fittings. This includes G1/4" sealing plugs for unused threads, screws for fans, and spacers for mounting it onto a case.

The MO-RA3 is produced in Europe. Development and final assembly happen in Germany, like the manufacturing of most of its components.

## Specifications

Specifications: Material core: Copper (tubes), aluminium (fins), Material casing: Powder-coated steel (white), polished stainless steel Dimensions (L x W x H): 475.5 x 430 x 65 mm Weight: approx. 7700 g Pressure tested: 5 bar Threads: 6x G ¼" (DIN ISO 228-1)

Included: 1x MO-RA3 420 LT white 4x Screw Plug G ¼" 4x Spacers M4x20 mm 1x Fan bracket and fan mounts for 140 mm fans 1x Screw kit for 25 mm heigh fans 1x Manual

### Additional Information

Brand	Watercool
SKU	WC-25101
Weight	17.0000
Color	White
Radiator Size	1260 (9x140mm)
Radiator Thickness	65mm
Internet Reviews	So let's look at what we have here- a (mostly) external radiator that is well built, and looks nice, such as a low speed making for an excellent low noise operation heat dissipation unit owing to the assive amount of surface area available. The MO-RA3 is more brute force than finesse, but it onk. To Read More Click "HERE"

